


YE-X1EH23 METRIC



**FINE-FINISHING SOLID CARBIDE END MILLS
FOR HIGH HARDENED STEEL**


- /// **Highest Accuracy for all Semi/Fine-Finishing application challenges**
- /// **Extensive Portfolio perfectly serving the Die&Mold Industry needs**
- /// **Latest Substrate and Coating Technology for predictive and extraordinary Tool Life**

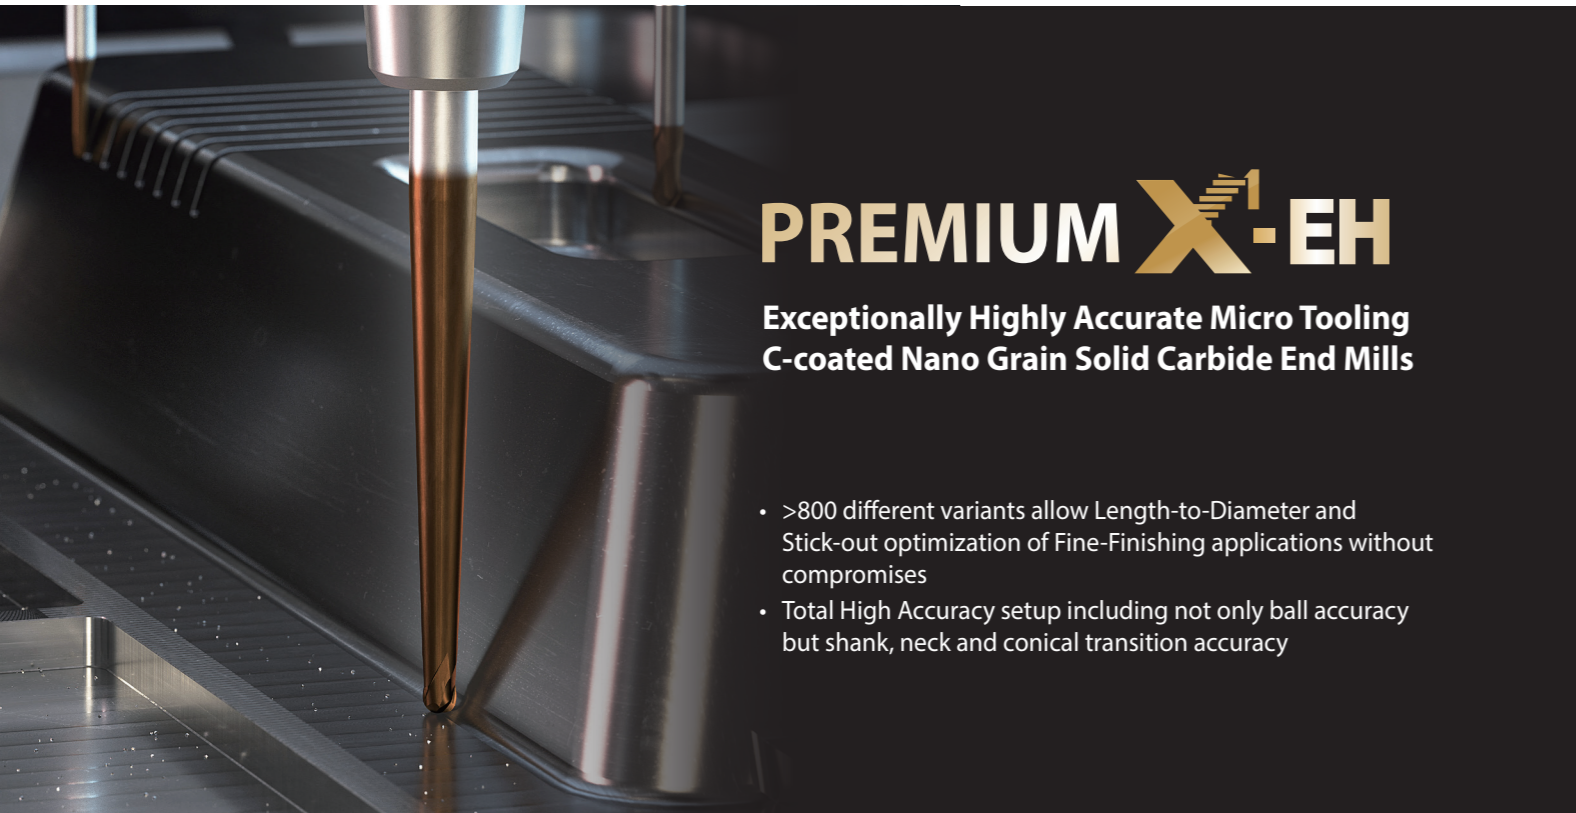

PREMIUM X¹-EH

Exceptionally Highly Accurate Micro Tooling
C-coated Nano Grain Solid Carbide End Mills

- >800 different variants allow Length-to-Diameter and Stick-out optimization of Fine-Finishing applications without compromises
- Total High Accuracy setup including not only ball accuracy but shank, neck and conical transition accuracy

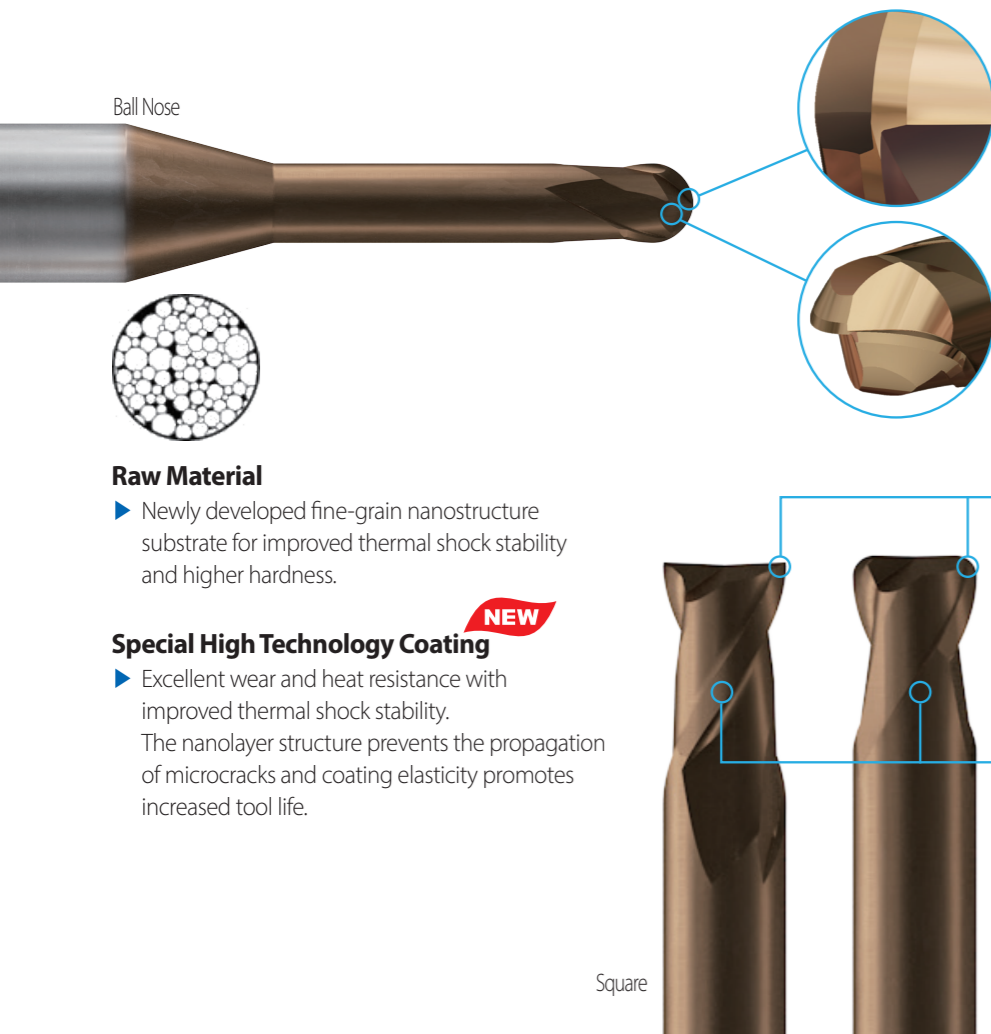

Ball Nose Gash Transition NEW

▶ Optimized transition from end mill center to flute for improved chip flow.

Reinforced Back Relief NEW

▶ Strengthened cutting edge design for greater stability while not interfering with chip flow.

Corner Geometries

▶ YG-1's High performance corner geometries, including corner radius, for longer tool life in high-hardness machining.

Edge Preparation


▶ Optimal edge preparation applied to prevent chipping and achieve excellent surface finishes with longer tool life in high speed machining.

Raw Material

▶ Newly developed fine-grain nanostructure substrate for improved thermal shock stability and higher hardness.

Special High Technology Coating NEW

▶ Excellent wear and heat resistance with improved thermal shock stability. The nanolayer structure prevents the propagation of microcracks and coating elasticity promotes increased tool life.

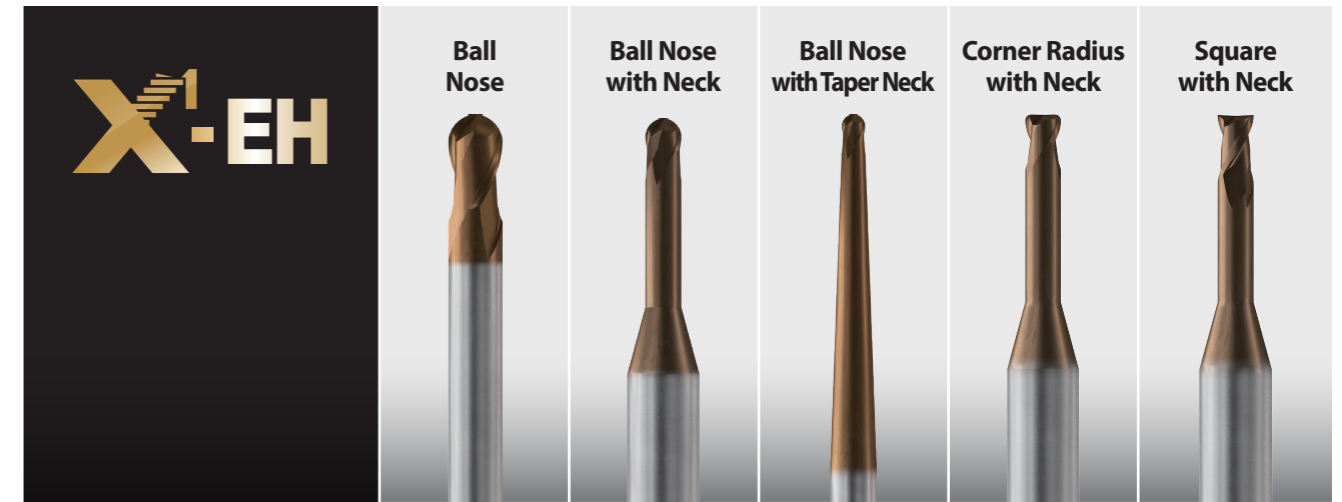

Cutting Portion Accuracy

$\leq \varnothing 6\text{mm}$ +1 μm -3 μm	$\leq \varnothing 6\text{mm}$ +1 μm -3 μm	$< \varnothing 6\text{mm}$ +1 μm -3 μm	$< \varnothing 6\text{mm}$ ±5 μm	
$> \varnothing 6\text{mm}$ +3 μm -7 μm	$> \varnothing 6\text{mm}$ +3 μm -7 μm	$> \varnothing 6\text{mm}$ +3 μm -7 μm		

Shank Accuracy

Size	Shank Dia. Tolerance
up to $\varnothing 6$	h4
over $\varnothing 6$	h5

Coating	Coating Color	Coating Type	Hardness (Hv)	Max. Usage Temperature (°C)	Friction Coefficient (dry)	Coating Thickness (μm)	General Information
C- Coating	Reddish Brown	Si-based	3,900	1,000	0.40	0.5 ~ 3.0	<ul style="list-style-type: none"> • Improved Hardness and Toughness • High Thermal Stability and Oxidation Resistance • Nanolayer Structure prevents Propagation of Microcracks • Extra-hard Surface with Good Anti-Friction Properties and a Low Tendency to Stick to the Machined Workpiece Material


GUIDE TO ICONS

The tool is made of nanograin carbide	No. of Flutes	Helix Angle		Tool Ends: Square / Corner Radius	Tolerance of Ball Radius	Tolerance of Corner Radius		Type of Shank	Type of Coating	Cutting Conditions

CASE STUDY

TEST I Profiling application


Ø3(R1.5) 2 Flute Ball Nose

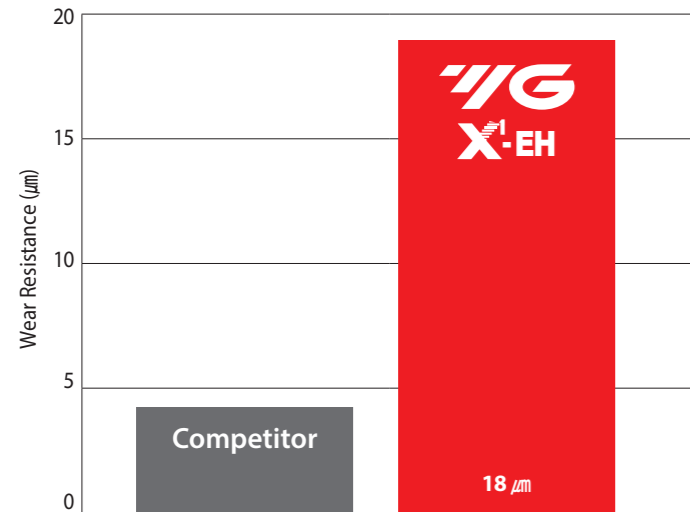

Cutting Condition (Profiling)


Tool	Ø3(R1.5) × Ø6 × 2.5(6) × 60
Work Material	DIN : 1.2379 JIS : SKD11(HRC63) AISI : D2
R.P.M (rev./min.)	21,000 rev./min.
Feed (mm/min.)	2,800 mm/min.
Milling Depth (mm)	0.06mm (0.02xD) (Axial Depth) 0.15mm (0.05xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling Length : 248m

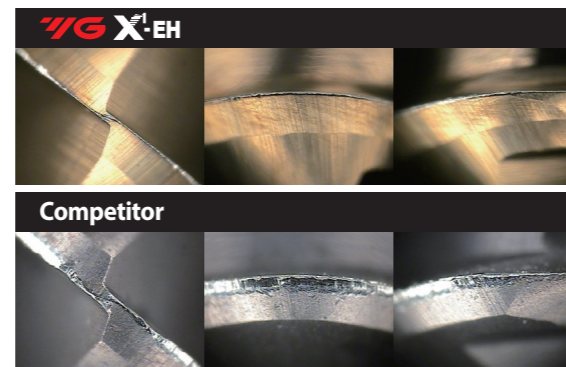

TEST III Profiling application


Ø3(R1.5) 2 Flute Ball Nose

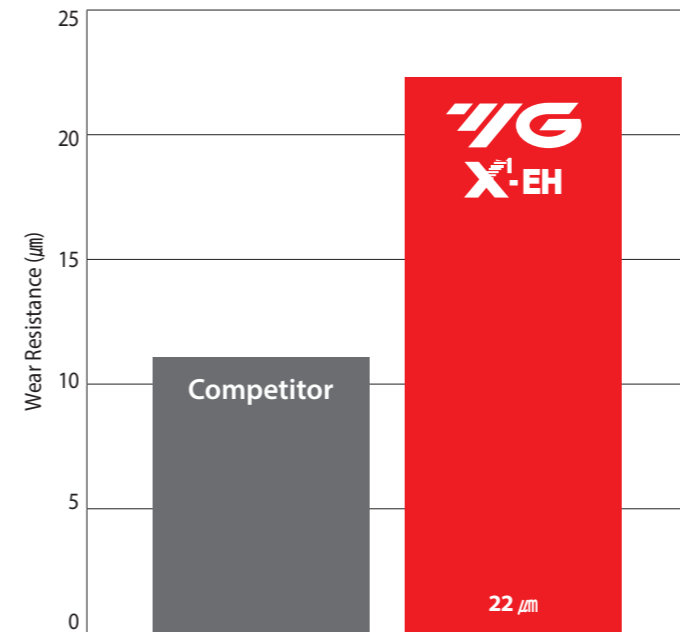

Cutting Condition (Profiling)


Tool	Ø3(R1.5) × Ø6 × 2.5(6) × 60
Work Material	DIN : X30Cr13 JIS : STAVAX(HRC52) AISI : 420
R.P.M (rev./min.)	26,500 rev./min.
Feed (mm/min.)	4,000 mm/min.
Milling Depth (mm)	0.06mm (0.02xD) (Axial Depth) 0.15mm (0.05xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling length : 620m

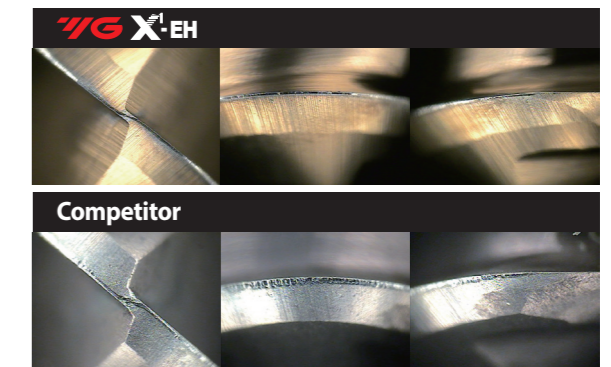

TEST II Side Cutting application


Ø6 2 Flute Square

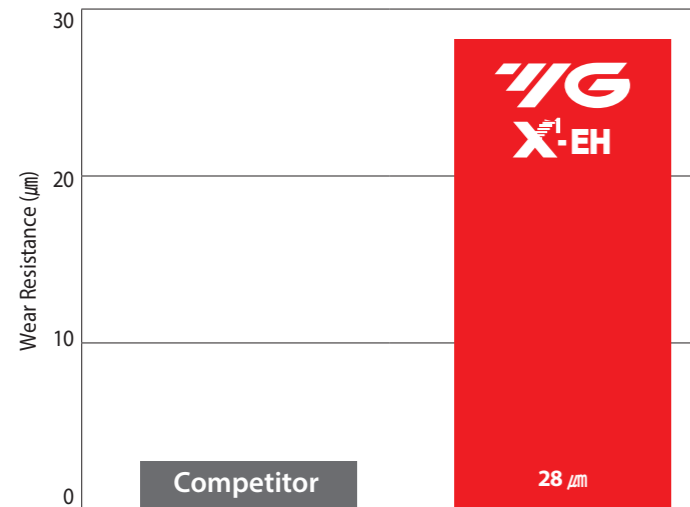

Cutting Condition (Side Cutting)


Tool	Ø6 × Ø6 × 15 × 50
Work Material	DIN : 1.2379 JIS : SKD11(HRC63) AISI : D2
R.P.M (rev./min.)	4200 rev./min.
Feed (mm/min.)	255 mm/min.
Milling Depth (mm)	6mm (1.0xD) (Axial Depth) 0.18mm (0.03xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling Length : 2m

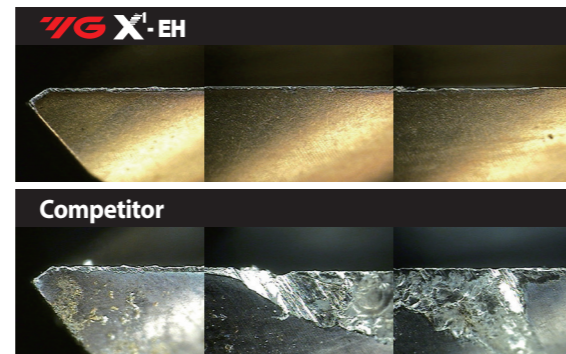

TEST IV Face Milling application


Ø0.6(R0.3) 2 Flute Ball Nose

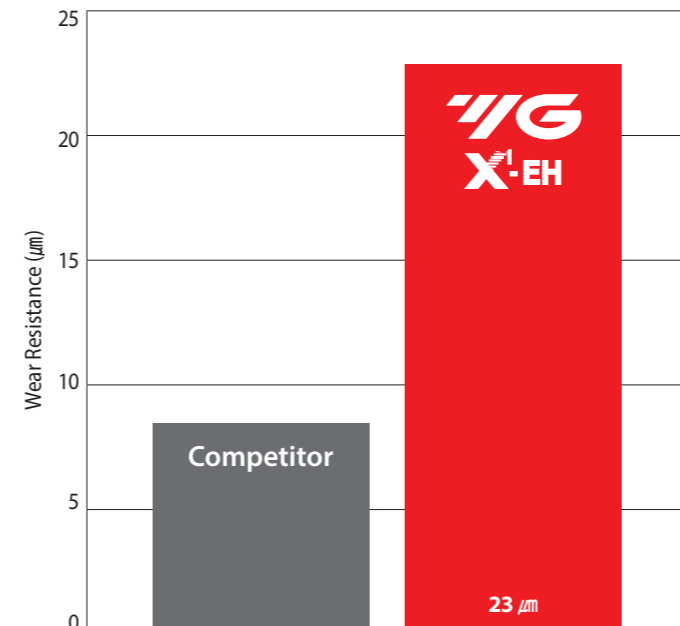

Cutting Condition (Face Milling)

Tool	Ø0.6(R0.3) × Ø4 × 0.45(1) × 45
Work Material	DIN : X30Cr13 JIS : STAVAX(HRC52) AISI : 420
R.P.M (rev./min.)	40,000 rev./min.
Feed (mm/min.)	1,400 mm/min.
Milling Depth (mm)	0.05mm (0.08xD) (Axial Depth) 0.1mm (0.16xD) (Radial Depth)
Coolant	Oil Mist
Machine	Machining Center

Total Milling length : 80m

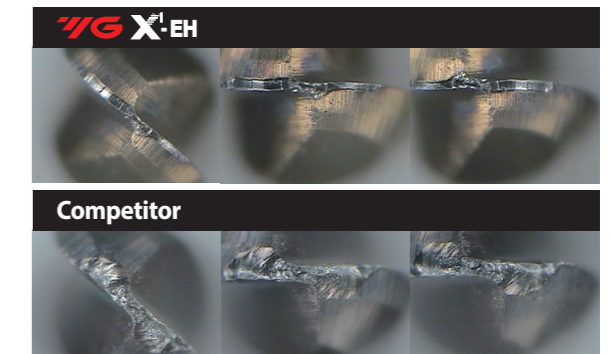

SERIES	HPI90	HPI91	HPI92	HPI89
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	35°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS
SIZE MIN	R0.05	R0.05	R0.5	D0.2
SIZE MAX	R10.0	R3.0	R6.0	D3.0
PAGE	8	9	19	28

C-COATED SOLID CARBIDE

X¹-EH
END MILLS



◎ : Excellent ○ : Good

Recommended cutting conditions : p.37-58

	HPI90	HPI91	HPI92	HPI89
C-COATING	C-COATING	C-COATING	C-COATING	C-COATING




ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	HPI90	HPI91	HPI92	HPI89	
P	1	Non-alloy steel	About 0.15% C	Annealed	125					
	2		About 0.45% C	Annealed	190	13				
	3		About 0.45% C	Quenched & tempered	250	25				
	4		About 0.75% C	Annealed	270	28				
	5		About 0.75% C	Quenched & tempered	300	32	○	○	○	○
	6	Low alloy steel		Annealed	180	10				
	7			Quenched & tempered	275	29				
	8			Quenched & tempered	300	32	○	○	○	○
	9			Quenched & tempered	350	38	○	○	○	○
	10			Annealed	200	15				
	11.1	High alloyed steel, and tool steel		Quenched & Tempered	325	35	○	○	○	○
11.2			Quenched & Tempered	409	44	○	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15				
	13		Martensitic	Quenched & Tempered	240	23				
	14.1		Austenitic	180	10					
	14.2		PH Stainless Steel	180	10					
K	15	Grey cast iron	Pearlitic / ferritic		180	10				
	16		Pearlitic (Martensitic)		260	26				
	17	Nodular cast iron	Ferritic		160	3				
	18		Pearlitic		250	25				
	19	Malleable cast iron	Ferritic		130					
20	Pearlitic			230	21					
N	21	Aluminum-wrought alloy	Not Curable		60					
	22		Curable	Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75					
	24		≤ 12% Si, Curable	Hardened	90					
	25		> 12% Si, Not Curable		130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110					
	27		CuZn, CuSnZn (Brass)		90					
	28		CuSn, lead-free copper and electrolytic copper		100					
	29.1		Duroplastic							
	29.2	Non Metallic Materials	GRAPHITE							
29.3	CFRP, GFRP									
30	Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15				
	32			Cured	280	30				
	33			Annealed	250	25				
	34		Ni or Co Based	Cured	350	38				
	35		Cast	320	34					
	36	Titanium Alloys	Pure Titanium		400 Rm					
37	Alpha + Beta Alloys		Hardened	1050 Rm						
H	38.1	Hardened steel		Hardened	421-469	45-49	◎	◎	◎	
	38.2			Hardened	481-560	50-55	◎	◎	◎	
	39.1			Hardened	577-654	56-60	◎	◎	◎	
	39.2			Hardened	670-739	61-65	◎	◎	◎	
	39.3			Hardened		66-70	◎	◎	◎	
	40	Chilled Cast Iron	Cast		400	42	○	○	○	
41	Hardened Cast Iron	Hardened		550	55	◎	◎	◎		

HPI88
2
35°
SQUARE
D0.1
D6.0
35
RIP PROCESSING
C-COATING



	1
	2
	3
	4
○	5
	6
	7
○	8
○	9
	10
○	11.1
○	11.2
	12
	13
	14.1
	14.2
	15
	16
	17
	18
	19
	20
	21
	22
	23
	24
	25
	26
	27
	28
	29.1
	29.2
	29.3
	30
	31
	32
	33
	34
	35
	36
	37
◎	38.1
◎	38.2
◎	39.1
◎	39.2
◎	39.3
○	40
◎	41

Scan QR Code to See Catalogue
DIE & MOLD




**C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE**

SERIES

PLAIN SHANK **HPI90**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

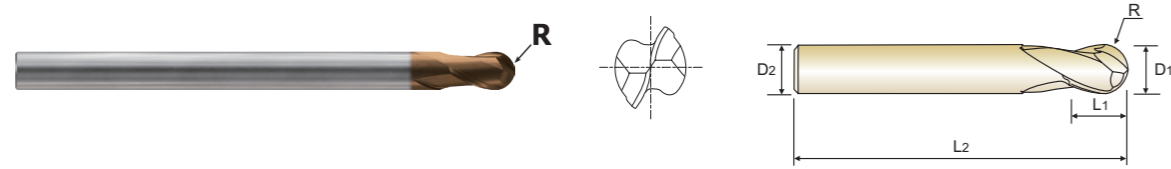

R0.05-R3 R4-R10

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D ₁	D ₂	L ₁	L ₂
HPI90001	R0.05	0.1	4	0.1	50
HPI900015	R0.075	0.15	4	0.15	50
HPI90002	R0.1	0.2	4	0.2	50
HPI90003	R0.15	0.3	4	0.3	50
HPI90004	R0.2	0.4	4	0.6	50
HPI90005	R0.25	0.5	4	0.8	50
HPI90006	R0.3	0.6	4	0.9	50
HPI90008	R0.4	0.8	4	1.2	50
HPI90010	R0.5	1.0	4	1.5	50
HPI90015	R0.75	1.5	4	2.3	50
HPI90020	R1.0	2.0	4	3	60
HPI90025	R1.25	2.5	6	3.8	60
HPI90030	R1.5	3.0	6	5	60
HPI90040	R2.0	4.0	4	6	70
HPI90901	R2.0	4.0	6	6	70
HPI90050	R2.5	5.0	6	8	70
HPI90060	R3.0	6.0	6	10	80
HPI90080	R4.0	8.0	8	12	100
HPI90100	R5.0	10.0	10	15	100
HPI90120	R6.0	12.0	12	18	110
HPI90160	R8.0	16.0	16	24	140
HPI90200	R10.0	20.0	20	30	160

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118
HB	125	190	250	270	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Recommend	○										○				○						


ISO Material Description	N					S					H													
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel			Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-500	577-654	670-739		400	550
Recommend	○					○					◎					○								

**C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING**

SERIES

PLAIN SHANK **HPI91**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

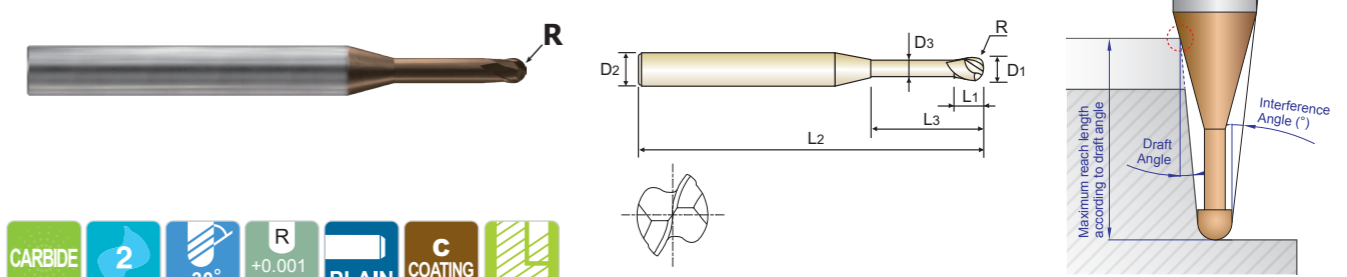

P.38-48

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
	R	D ₁	D ₂	L ₁	L ₃	L ₂	D ₃		0.5°	1°	1.5°	2°	3°
	HPI91001	R0.05	0.1	4	0.07	0.2	45		0.085	14.66	0.25	0.26	0.28
HPI91901	R0.05	0.1	4	0.07	0.3	45	0.085	14.47	0.36	0.37	0.39	0.41	0.47
HPI91902	R0.05	0.1	4	0.07	0.5	45	0.085	14.11	0.57	0.60	0.63	0.66	0.75
HPI910015	R0.075	0.15	4	0.1	0.3	45	0.135	14.51	0.36	0.37	0.39	0.41	0.46
HPI91903	R0.075	0.15	4	0.1	0.5	45	0.135	14.15	0.57	0.59	0.62	0.66	0.74
HPI91904	R0.075	0.15	4	0.1	1	45	0.135	13.31	1.09	1.15	1.21	1.28	1.45
HPI91002	R0.1	0.2	4	0.15	0.3	45	0.17	14.50	0.40	0.42	0.43	0.46	0.51
HPI91905	R0.1	0.2	4	0.15	0.5	45	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91906	R0.1	0.2	4	0.15	0.75	45	0.17	13.70	0.87	0.92	0.96	1.02	1.15
HPI91907	R0.1	0.2	4	0.15	1	45	0.17	13.29	1.14	1.19	1.26	1.33	1.50
HPI91908	R0.1	0.2	4	0.15	1	50	0.17	13.29	1.14	1.19	1.26	1.33	1.50
HPI91909	R0.1	0.2	4	0.15	1.25	45	0.17	12.90	1.40	1.47	1.55	1.64	1.86
HPI91910	R0.1	0.2	4	0.15	1.5	45	0.17	12.53	1.66	1.75	1.84	1.95	2.21
HPI91911	R0.1	0.2	4	0.15	1.75	45	0.17	12.19	1.93	2.03	2.14	2.26	2.57
HPI91912	R0.1	0.2	4	0.15	2	45	0.17	11.86	2.19	2.30	2.43	2.58	2.92
HPI91913	R0.1	0.2	4	0.15	2.5	45	0.17	11.26	2.71	2.86	3.02	3.20	3.64
HPI91914	R0.1	0.2	4	0.15	3	45	0.17	10.71	3.24	3.41	3.61	3.82	4.35
HPI91915	R0.1	0.2	4	0.2	0.5	35	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91916	R0.1	0.2	4	0.2	0.5	50	0.17	14.13	0.61	0.64	0.67	0.70	0.79
HPI91917	R0.1	0.2	6	0.2	0.5	50	0.17	14.42	0.61	0.64	0.67	0.70	0.79
HPI91003	R0.15	0.3	4	0.2	0.5	45	0.27	14.20	0.61	0.63	0.66	0.69	0.77
HPI91918	R0.15	0.3	4	0.2	0.6	45	0.27	14.02	0.71	0.74	0.78	0.82	0.91
HPI91919	R0.15	0.3	4	0.2	0.75	45	0.27	13.75	0.87	0.91	0.95	1.00	1.12
HPI91920	R0.15	0.3	4	0.2	1	45	0.27	13.33	1.13	1.19	1.25	1.32	1.48
HPI91921	R0.15	0.3	4	0.2	1.25	45	0.27	12.93	1.40	1.47	1.54	1.63	1.84
HPI91922	R0.15	0.3	4	0.2	1.5	45	0.27	12.55	1.66	1.74	1.84	1.94	2.19

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

NEXT PAGE ▶

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118
HB	125	190	250	270	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
Recommend	○										○				○						

ISO Material Description	N					S					H													
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel			Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-500	577-654	670-739		400	550
Recommend	○					○					◎					○								

C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING

SERIES
PLAIN SHANK **HPI91**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

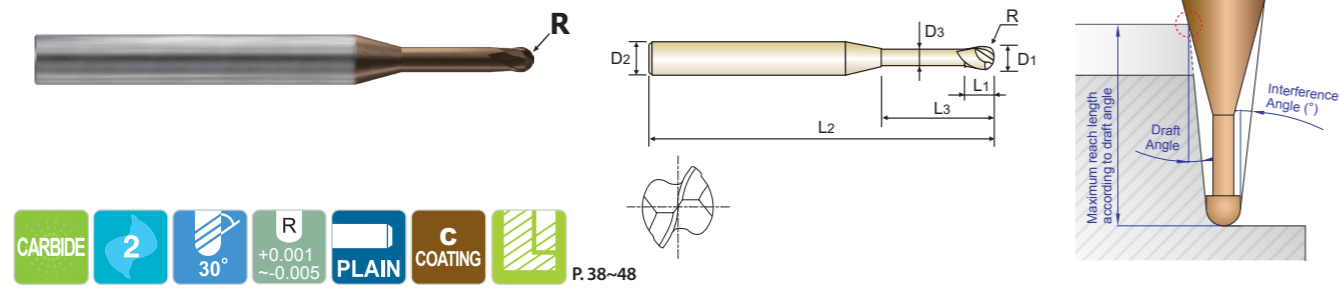

Unit : mm

EDP No.	Radius of Ball Nose R	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3	Interference Angle (°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91923	R0.15	0.3	4	0.2	1.75	45	0.27	12.19	1.92	2.02	2.13	2.25	2.55
HPI91924	R0.15	0.3	4	0.2	2	45	0.27	11.86	2.19	2.30	2.42	2.56	2.90
HPI91925	R0.15	0.3	4	0.2	2.25	45	0.27	11.54	2.45	2.58	2.72	2.87	3.26
HPI91926	R0.15	0.3	4	0.2	2.5	45	0.27	11.24	2.71	2.85	3.01	3.19	3.61
HPI91927	R0.15	0.3	4	0.2	3	45	0.27	10.68	3.24	3.41	3.60	3.81	4.33
HPI91928	R0.15	0.3	4	0.2	3.5	45	0.27	10.17	3.76	3.96	4.18	4.43	5.04
HPI91929	R0.15	0.3	4	0.2	4	45	0.27	9.71	4.29	4.52	4.77	5.06	5.75
HPI91930	R0.15	0.3	6	0.2	1.5	50	0.27	13.31	1.66	1.74	1.84	1.94	2.19
HPI91004	R0.2	0.4	4	0.3	0.5	45	0.37	14.28	0.61	0.63	0.65	0.68	0.75
HPI91931	R0.2	0.4	4	0.3	0.8	45	0.37	13.72	0.92	0.96	1.00	1.05	1.17
HPI91932	R0.2	0.4	4	0.3	1	45	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91933	R0.2	0.4	4	0.3	1.5	45	0.37	12.57	1.66	1.74	1.83	1.93	2.17
HPI91934	R0.2	0.4	4	0.3	2	45	0.37	11.86	2.18	2.29	2.41	2.55	2.88
HPI91935	R0.2	0.4	4	0.3	2.5	45	0.37	11.22	2.71	2.85	3.00	3.17	3.59
HPI91936	R0.2	0.4	4	0.3	3	45	0.37	10.65	3.24	3.40	3.59	3.80	4.31
HPI91937	R0.2	0.4	4	0.3	3.5	45	0.37	10.13	3.76	3.96	4.18	4.42	5.02
HPI91938	R0.2	0.4	4	0.3	4	45	0.37	9.66	4.29	4.51	4.76	5.04	5.73
HPI91939	R0.2	0.4	4	0.3	4.5	45	0.37	9.23	4.81	5.07	5.35	5.67	6.44
HPI91940	R0.2	0.4	4	0.3	5	45	0.37	8.84	5.34	5.62	5.94	6.29	7.15
HPI91941	R0.2	0.4	4	0.3	6	45	0.37	8.15	6.39	6.73	7.11	7.54	8.57
HPI91942	R0.2	0.4	4	0.4	1	35	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91943	R0.2	0.4	4	0.4	1	50	0.37	13.37	1.13	1.18	1.24	1.30	1.46
HPI91944	R0.2	0.4	6	0.3	1	50	0.37	13.91	1.13	1.18	1.24	1.30	1.46
HPI91945	R0.2	0.4	6	0.3	2	50	0.37	12.82	2.18	2.29	2.41	2.55	2.88
HPI91946	R0.2	0.4	6	0.4	1	50	0.37	13.91	1.13	1.18	1.24	1.30	1.46
HPI91005	R0.25	0.5	4	0.35	1	45	0.45	13.35	1.19	1.24	1.30	1.36	1.52

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

NEXT PAGE ▶


◎ : Excellent ○ : Good

ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
HRC	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118	123	128	133	138	143	148	153	158	163	168	173	178	183	188	193	198	203	208	213	218	223	228	233	238	243	248	253	258	263	268	273	278	283	288	293	298	303	308	313	318	323	328	333	338	343	348	353	358	363	368	373	378	383	388	393	398	403	408	413	418	423	428	433	438	443	448	453	458	463	468	473	478	483	488	493	498	503	508	513	518	523	528	533	538	543	548	553	558	563	568	573	578	583	588	593	598	603	608	613	618	623	628	633	638	643	648	653	658	663	668	673	678	683	688	693	698	703	708	713	718	723	728	733	738	743	748	753	758	763	768	773	778	783	788	793	798	803	808	813	818	823	828	833	838	843	848	853	858	863	868	873	878	883	888	893	898	903	908	913	918	923	928	933	938	943	948	953	958	963	968	973	978	983	988	993	998	1003	1008	1013	1018	1023	1028	1033	1038	1043	1048	1053	1058	1063	1068	1073	1078	1083	1088	1093	1098	1103	1108	1113	1118	1123	1128	1133	1138	1143	1148	1153	1158	1163	1168	1173	1178	1183	1188	1193	1198	1203	1208	1213	1218	1223	1228	1233	1238	1243	1248	1253	1258	1263	1268	1273	1278	1283	1288	1293	1298	1303	1308	1313	1318	1323	1328	1333	1338	1343	1348	1353	1358	1363	1368	1373	1378	1383	1388	1393	1398	1403	1408	1413	1418	1423	1428	1433	1438	1443	1448	1453	1458	1463	1468	1473	1478	1483	1488	1493	1498	1503	1508	1513	1518	1523	1528	1533	1538	1543	1548	1553	1558	1563	1568	1573	1578	1583	1588	1593	1598	1603	1608	1613	1618	1623	1628	1633	1638	1643	1648	1653	1658	1663	1668	1673	1678	1683	1688	1693	1698	1703	1708	1713	1718	1723	1728	1733	1738	1743	1748	1753	1758	1763	1768	1773	1778	1783	1788	1793	1798	1803	1808	1813	1818	1823	1828	1833	1838	1843	1848	1853	1858	1863	1868	1873	1878	1883	1888	1893	1898	1903	1908	1913	1918	1923	1928	1933	1938	1943	1948	1953	1958	1963	1968	1973	1978	1983	1988	1993	1998	2003	2008	2013	2018	2023	2028	2033	2038	2043	2048	2053	2058	2063	2068	2073	2078	2083	2088	2093	2098	2103	2108	2113	2118	2123	2128	2133	2138	2143	2148	2153	2158	2163	2168	2173	2178	2183	2188	2193	2198	2203	2208	2213	2218	2223	2228	2233	2238	2243	2248	2253	2258	2263	2268	2273	2278	2283	2288	2293	2298	2303	2308	2313	2318	2323	2328	2333	2338	2343	2348	2353	2358	2363	2368	2373	2378	2383	2388	2393	2398	2403	2408	2413	2418	2423	2428	2433	2438	2443	2448	2453	2458	2463	2468	2473	2478	2483	2488	2493	2498	2503	2508	2513	2518	2523	2528	2533	2538	2543	2548	2553	2558	2563	2568	2573	2578	2583	2588	2593	2598	2603	2608	2613	2618	2623	2628	2633	2638	2643	2648	2653	2658	2663	2668	2673	2678	2683	2688	2693	2698	2703	2708	2713	2718	2723	2728	2733	2738	2743	2748	2753	2758	2763	2768	2773	2778	2783	2788	2793	2798	2803	2808	2813	2818	2823	2828	2833	2838	2843	2848	2853	2858	2863	2868	2873	2878	2883	2888	2893	2898	2903	2908	2913	2918	2923	2928	2933	2938	2943	2948	2953	2958	2963	2968	2973	2978	2983	2988	2993	2998	3003	3008	3013	3018	3023	3028	3033	3038	3043	3048	3053	3058	3063	3068	3073	3078	3083	3088	3093	3098	3103	3108	3113	3118	3123	3128	3133	3138	3143	3148	3153	3158	3163	3168	3173	3178	3183	3188	3193	3198	3203	3208	3213	3218	3223	3228	3233	3238	3243	3248	3253	3258	3263	3268	3273	3278	3283	3288	3293	3298	3303	3308	3313	3318	3323	3328	3333	3338	3343	3348	3353	3358	3363	3368	3373	3378	3383	3388	3393	3398	3403	3408	3413	3418	3423	3428	3433	3438	3443	3448	3453	3458	3463	3468	3473	3478	3483	3488	3493	3498	3503	3508	3513	3518	3523	3528	3533	3538	3543	3548	3553	3558	3563	3568	3573	3578	3583	3588	3593	3598	3603	3608	3613	3618	3623	3628	3633	3638	3643	3648	3653	3658	3663	3668	3673	3678	3683	3688	3693	3698	3703	3708	3713	3718	3723	3728	3733	3738	3743	3748	3753	3758	3763	3768	3773	3778	3783	3788	3793	3798	3803	3808	3813	3818	3823	3828	3833	3838	3843	3848	3853	3858	3863	3868	3873	3878	3883	3888	3893	3898	3903	3908	3913	3918	3923	3928	3933	3938	3943	3948	3953	3958	3963	3968	3973	3978	3983	3988	3993	3998	4003	4008	4013	4018	4023	4028	4033	4038	4043	4048	4053	4058	4063	4068	4073	4078	4083	4088	4093	4098	4103	4108	4113	4118	4123	4128	4133	4138	4143	4148	4153	4158	4163	4168	4173	4178	4183	4188	4193	4198	4203	4208	4213	4218	4223	4228	4233	4238	4243	4248	4253	4258	4263	4268	4273	4278	4283	4288	4293	4298	4303	4308	4313	4318	4323	4328	4333	4338	4343	4348	4353	4358	4363	4368	4373	4378	4383	4388	4393	4398	4403	4408

C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING

SERIES
PLAIN SHANK **HPI91**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

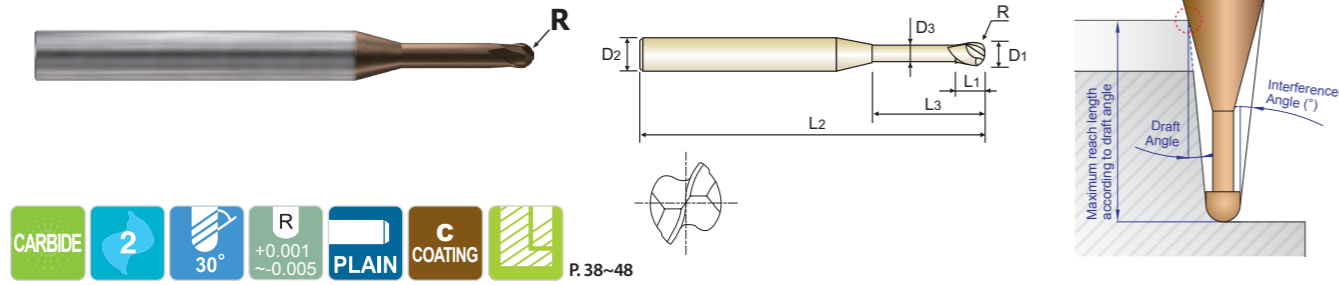

CARBIDE 2 30° +0.001/-0.005 PLAIN COATING P.38~48

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91972	R0.3	0.6	4	0.45	8	45	0.55	6.86	8.55	9.00	9.51	10.08	11.36
HPI91973	R0.3	0.6	4	0.45	9	45	0.55	6.41	9.60	10.11	10.68	11.33	12.53
HPI91974	R0.3	0.6	4	0.45	10	45	0.55	6.01	10.65	11.22	11.86	12.57	13.70
HPI91975	R0.3	0.6	4	0.45	12	45	0.55	5.35	12.76	13.44	14.21	15.07	16.03
HPI91976	R0.3	0.6	4	0.6	1.5	35	0.55	12.55	1.71	1.79	1.88	1.97	2.21
HPI91977	R0.3	0.6	4	0.6	1.5	50	0.55	12.55	1.71	1.79	1.88	1.97	2.21
HPI91978	R0.3	0.6	6	0.45	2	50	0.55	12.81	2.24	2.34	2.46	2.60	2.92
HPI91979	R0.3	0.6	6	0.45	3	50	0.55	11.85	3.29	3.45	3.64	3.84	4.34
HPI91980	R0.3	0.6	6	0.45	4	50	0.55	11.02	4.34	4.56	4.81	5.09	5.77
HPI91981	R0.3	0.6	6	0.6	1.5	50	0.55	13.36	1.71	1.79	1.88	1.97	2.21
HPI91007	R0.35	0.7	4	0.5	2	45	0.65	11.80	2.24	2.34	2.45	2.58	2.90
HPI91982	R0.35	0.7	4	0.5	4	45	0.65	9.46	4.34	4.56	4.80	5.08	5.75
HPI91983	R0.35	0.7	4	0.5	6	45	0.65	7.89	6.44	6.78	7.15	7.57	8.59
HPI91984	R0.35	0.7	4	0.5	8	45	0.65	6.77	8.55	9.00	9.50	10.07	11.29
HPI91008	R0.4	0.8	4	0.6	2	45	0.75	11.79	2.23	2.33	2.45	2.57	2.88
HPI91985	R0.4	0.8	4	0.6	3	45	0.75	10.46	3.28	3.44	3.62	3.82	4.30
HPI91986	R0.4	0.8	4	0.6	4	45	0.75	9.40	4.34	4.55	4.79	5.07	5.72
HPI91987	R0.4	0.8	4	0.6	5	45	0.75	8.53	5.39	5.66	5.97	6.31	7.15
HPI91988	R0.4	0.8	4	0.6	6	45	0.75	7.81	6.44	6.77	7.14	7.56	8.57
HPI91989	R0.4	0.8	4	0.6	7	45	0.75	7.20	7.49	7.88	8.32	8.81	9.99
HPI91990	R0.4	0.8	4	0.6	8	45	0.75	6.68	8.54	8.99	9.49	10.05	11.23
HPI91991	R0.4	0.8	4	0.6	10	45	0.75	5.83	10.65	11.21	11.84	12.55	13.56
HPI91992	R0.4	0.8	4	0.6	12	45	0.75	5.18	12.75	13.43	14.19	15.04	15.90
HPI91993	R0.4	0.8	4	0.8	2	35	0.75	11.79	2.23	2.33	2.45	2.57	2.88
HPI91994	R0.4	0.8	4	0.8	2	50	0.75	11.79	2.23	2.33	2.45	2.57	2.88
HPI91995	R0.4	0.8	6	0.6	2	50	0.75	12.85	2.23	2.33	2.45	2.57	2.88

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

NEXT PAGE ▶


◎ : Excellent ○ : Good

ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
HRC	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118	123	128	133	138	143	148	153	158	163	168	173	178	183	188	193	198	203	208	213	218	223	228	233	238	243	248	253	258	263	268	273	278	283	288	293	298	303	308	313	318	323	328	333	338	343	348	353	358	363	368	373	378	383	388	393	398	403	408	413	418	423	428	433	438	443	448	453	458	463	468	473	478	483	488	493	498	503	508	513	518	523	528	533	538	543	548	553	558	563	568	573	578	583	588	593	598	603	608	613	618	623	628	633	638	643	648	653	658	663	668	673	678	683	688	693	698	703	708	713	718	723	728	733	738	743	748	753	758	763	768	773	778	783	788	793	798	803	808	813	818	823	828	833	838	843	848	853	858	863	868	873	878	883	888	893	898	903	908	913	918	923	928	933	938	943	948	953	958	963	968	973	978	983	988	993	998	1003	1008	1013	1018	1023	1028	1033	1038	1043	1048	1053	1058	1063	1068	1073	1078	1083	1088	1093	1098	1103	1108	1113	1118	1123	1128	1133	1138	1143	1148	1153	1158	1163	1168	1173	1178	1183	1188	1193	1198	1203	1208	1213	1218	1223	1228	1233	1238	1243	1248	1253	1258	1263	1268	1273	1278	1283	1288	1293	1298	1303	1308	1313	1318	1323	1328	1333	1338	1343	1348	1353	1358	1363	1368	1373	1378	1383	1388	1393	1398	1403	1408	1413	1418	1423	1428	1433	1438	1443	1448	1453	1458	1463	1468	1473	1478	1483	1488	1493	1498	1503	1508	1513	1518	1523	1528	1533	1538	1543	1548	1553	1558	1563	1568	1573	1578	1583	1588	1593	1598	1603	1608	1613	1618	1623	1628	1633	1638	1643	1648	1653	1658	1663	1668	1673	1678	1683	1688	1693	1698	1703	1708	1713	1718	1723	1728	1733	1738	1743	1748	1753	1758	1763	1768	1773	1778	1783	1788	1793	1798	1803	1808	1813	1818	1823	1828	1833	1838	1843	1848	1853	1858	1863	1868	1873	1878	1883	1888	1893	1898	1903	1908	1913	1918	1923	1928	1933	1938	1943	1948	1953	1958	1963	1968	1973	1978	1983	1988	1993	1998	2003	2008	2013	2018	2023	2028	2033	2038	2043	2048	2053	2058	2063	2068	2073	2078	2083	2088	2093	2098	2103	2108	2113	2118	2123	2128	2133	2138	2143	2148	2153	2158	2163	2168	2173	2178	2183	2188	2193	2198	2203	2208	2213	2218	2223	2228	2233	2238	2243	2248	2253	2258	2263	2268	2273	2278	2283	2288	2293	2298	2303	2308	2313	2318	2323	2328	2333	2338	2343	2348	2353	2358	2363	2368	2373	2378	2383	2388	2393	2398	2403	2408	2413	2418	2423	2428	2433	2438	2443	2448	2453	2458	2463	2468	2473	2478	2483	2488	2493	2498	2503	2508	2513	2518	2523	2528	2533	2538	2543	2548	2553	2558	2563	2568	2573	2578	2583	2588	2593	2598	2603	2608	2613	2618	2623	2628	2633	2638	2643	2648	2653	2658	2663	2668	2673	2678	2683	2688	2693	2698	2703	2708	2713	2718	2723	2728	2733	2738	2743	2748	2753	2758	2763	2768	2773	2778	2783	2788	2793	2798	2803	2808	2813	2818	2823	2828	2833	2838	2843	2848	2853	2858	2863	2868	2873	2878	2883	2888	2893	2898	2903	2908	2913	2918	2923	2928	2933	2938	2943	2948	2953	2958	2963	2968	2973	2978	2983	2988	2993	2998	3003	3008	3013	3018	3023	3028	3033	3038	3043	3048	3053	3058	3063	3068	3073	3078	3083	3088	3093	3098	3103	3108	3113	3118	3123	3128	3133	3138	3143	3148	3153	3158	3163	3168	3173	3178	3183	3188	3193	3198	3203	3208	3213	3218	3223	3228	3233	3238	3243	3248	3253	3258	3263	3268	3273	3278	3283	3288	3293	3298	3303	3308	3313	3318	3323	3328	3333	3338	3343	3348	3353	3358	3363	3368	3373	3378	3383	3388	3393	3398	3403	3408	3413	3418	3423	3428	3433	3438	3443	3448	3453	3458	3463	3468	3473	3478	3483	3488	3493	3498	3503	3508	3513	3518	3523	3528	3533	3538	3543	3548	3553	3558	3563	3568	3573	3578	3583	3588	3593	3598	3603	3608	3613	3618	3623	3628	3633	3638	3643	3648	3653	3658	3663	3668	3673	3678	3683	3688	3693	3698	3703	3708	3713	3718	3723	3728	3733	3738	3743	3748	3753	3758	3763	3768	3773	3778	3783	3788	3793	3798	3803	3808	3813	3818	3823	3828	3833	3838	3843	3848	3853	3858	3863	3868	3873	3878	3883	3888	3893	3898	3903	3908	3913	3918	3923	3928	3933	3938	3943	3948	3953	3958	3963	3968	3973	3978	3983	3988	3993	3998	4003	4008	4013	4018	4023	4028	4033	4038	4043	4048	4053	4058	4063	4068	4073	4078	4083	4088	4093	4098	4103	4108	4113	4118	4123	4128	4133	4138	4143	4148	4153	4158	4163	4168	4173	4178	4183	4188	4193	4198	4203	4208	4213	4218	4223	4228	4233	4238	4243	4248	4253	4258	4263	4268	4273	4278	4283	4288	4293	4298	4303	4308	4313	4318	4323	4328	4333	4338	4343	4348	4353	4358	4363	4368	4373	4378	4383	4388	4393	4398	4403	4408	4413	4418	4

C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING

SERIES
PLAIN SHANK **HPI91**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

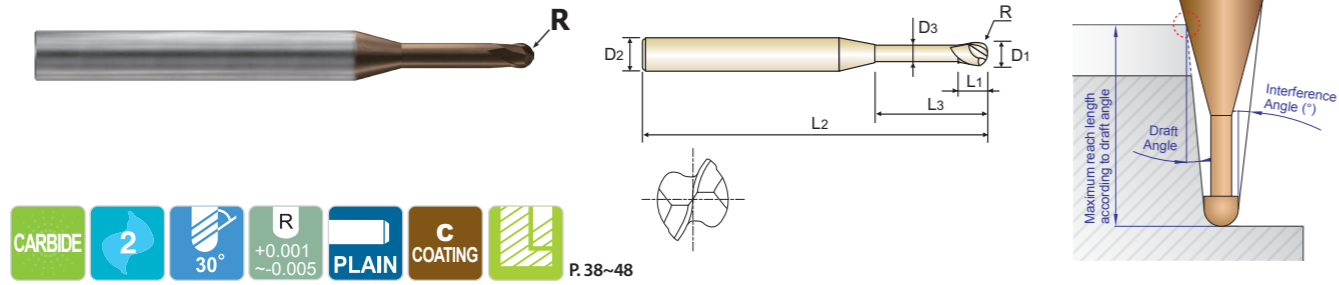

CARBIDE 2 30° +0.001/-0.005 PLAIN COATING P.38~48

Unit : mm

EDP No.	Radius of Ball Nose R	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3	Interference Angle (°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91821	R0.5	1.0	6	0.75	6	50	0.95	9.51	6.44	6.76	7.13	7.54	8.53
HPI91822	R0.5	1.0	6	0.75	7	50	0.95	8.92	7.49	7.87	8.30	8.78	9.95
HPI91823	R0.5	1.0	6	0.75	8	50	0.95	8.40	8.54	8.98	9.47	10.03	11.37
HPI91824	R0.5	1.0	6	0.75	10	50	0.95	7.53	10.64	11.20	11.82	12.52	14.22
HPI91825	R0.5	1.0	6	0.75	22	60	0.95	4.62	23.27	24.52	25.92	27.11	28.60
HPI91826	R0.5	1.0	6	1	2.5	50	0.95	12.34	2.75	2.88	3.02	3.17	3.55
HPI91012	R0.6	1.2	4	0.9	2.4	45	1.15	11.13	2.56	2.63	2.70	2.78	2.95
HPI91827	R0.6	1.2	4	0.9	4	45	1.15	9.12	4.21	4.34	4.47	4.62	4.94
HPI91828	R0.6	1.2	4	0.9	6	45	1.15	7.44	6.28	6.48	6.69	6.92	7.43
HPI91829	R0.6	1.2	4	0.9	8	45	1.15	6.28	8.35	8.62	8.90	9.22	9.92
HPI91830	R0.6	1.2	4	0.9	10	45	1.15	5.43	10.41	10.75	11.12	11.52	12.40
HPI91831	R0.6	1.2	4	0.9	12	45	1.15	4.79	12.48	12.89	13.34	13.82	14.89
HPI91832	R0.6	1.2	4	0.9	14	50	1.15	4.28	14.55	15.03	15.55	16.12	17.37
HPI91833	R0.6	1.2	4	0.9	16	50	1.15	3.87	16.61	17.17	17.77	18.42	19.86
HPI91834	R0.6	1.2	4	1.2	3	40	1.15	10.28	3.18	3.27	3.36	3.47	3.70
HPI91014	R0.7	1.4	4	1	8	45	1.35	6.06	8.34	8.61	8.89	9.20	9.89
HPI91835	R0.7	1.4	4	1	12	50	1.35	4.58	12.48	12.89	13.33	13.80	14.86
HPI91836	R0.7	1.4	4	1	16	50	1.35	3.67	16.61	17.17	17.76	18.40	19.84
HPI91015	R0.75	1.5	4	1.1	3	45	1.45	10.11	3.17	3.26	3.35	3.44	3.66
HPI91837	R0.75	1.5	4	1.1	4	45	1.45	8.87	4.21	4.33	4.46	4.59	4.91
HPI91838	R0.75	1.5	4	1.1	6	45	1.45	7.12	6.27	6.47	6.67	6.89	7.39
HPI91839	R0.75	1.5	4	1.1	8	45	1.45	5.94	8.34	8.61	8.89	9.19	9.88
HPI91840	R0.75	1.5	4	1.1	10	45	1.45	5.10	10.41	10.74	11.11	11.49	12.37
HPI91841	R0.75	1.5	4	1.1	12	45	1.45	4.46	12.48	12.88	13.32	13.79	14.85
HPI91842	R0.75	1.5	4	1.1	14	50	1.45	3.97	14.54	15.02	15.54	16.09	17.34
HPI91843	R0.75	1.5	4	1.1	16	50	1.45	3.57	16.61	17.16	17.76	18.39	19.82

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

NEXT PAGE ▶

◎ : Excellent ○ : Good


ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
HRC	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118	123	128	133	138	143	148	153	158	163	168	173	178	183	188	193	198	203	208	213	218	223	228	233	238	243	248	253	258	263	268	273	278	283	288	293	298	303	308	313	318	323	328	333	338	343	348	353	358	363	368	373	378	383	388	393	398	403	408	413	418	423	428	433	438	443	448	453	458	463	468	473	478	483	488	493	498	503	508	513	518	523	528	533	538	543	548	553	558	563	568	573	578	583	588	593	598	603	608	613	618	623	628	633	638	643	648	653	658	663	668	673	678	683	688	693	698	703	708	713	718	723	728	733	738	743	748	753	758	763	768	773	778	783	788	793	798	803	808	813	818	823	828	833	838	843	848	853	858	863	868	873	878	883	888	893	898	903	908	913	918	923	928	933	938	943	948	953	958	963	968	973	978	983	988	993	998	1003	1008	1013	1018	1023	1028	1033	1038	1043	1048	1053	1058	1063	1068	1073	1078	1083	1088	1093	1098	1103	1108	1113	1118	1123	1128	1133	1138	1143	1148	1153	1158	1163	1168	1173	1178	1183	1188	1193	1198	1203	1208	1213	1218	1223	1228	1233	1238	1243	1248	1253	1258	1263	1268	1273	1278	1283	1288	1293	1298	1303	1308	1313	1318	1323	1328	1333	1338	1343	1348	1353	1358	1363	1368	1373	1378	1383	1388	1393	1398	1403	1408	1413	1418	1423	1428	1433	1438	1443	1448	1453	1458	1463	1468	1473	1478	1483	1488	1493	1498	1503	1508	1513	1518	1523	1528	1533	1538	1543	1548	1553	1558	1563	1568	1573	1578	1583	1588	1593	1598	1603	1608	1613	1618	1623	1628	1633	1638	1643	1648	1653	1658	1663	1668	1673	1678	1683	1688	1693	1698	1703	1708	1713	1718	1723	1728	1733	1738	1743	1748	1753	1758	1763	1768	1773	1778	1783	1788	1793	1798	1803	1808	1813	1818	1823	1828	1833	1838	1843	1848	1853	1858	1863	1868	1873	1878	1883	1888	1893	1898	1903	1908	1913	1918	1923	1928	1933	1938	1943	1948	1953	1958	1963	1968	1973	1978	1983	1988	1993	1998	2003	2008	2013	2018	2023	2028	2033	2038	2043	2048	2053	2058	2063	2068	2073	2078	2083	2088	2093	2098	2103	2108	2113	2118	2123	2128	2133	2138	2143	2148	2153	2158	2163	2168	2173	2178	2183	2188	2193	2198	2203	2208	2213	2218	2223	2228	2233	2238	2243	2248	2253	2258	2263	2268	2273	2278	2283	2288	2293	2298	2303	2308	2313	2318	2323	2328	2333	2338	2343	2348	2353	2358	2363	2368	2373	2378	2383	2388	2393	2398	2403	2408	2413	2418	2423	2428	2433	2438	2443	2448	2453	2458	2463	2468	2473	2478	2483	2488	2493	2498	2503	2508	2513	2518	2523	2528	2533	2538	2543	2548	2553	2558	2563	2568	2573	2578	2583	2588	2593	2598	2603	2608	2613	2618	2623	2628	2633	2638	2643	2648	2653	2658	2663	2668	2673	2678	2683	2688	2693	2698	2703	2708	2713	2718	2723	2728	2733	2738	2743	2748	2753	2758	2763	2768	2773	2778	2783	2788	2793	2798	2803	2808	2813	2818	2823	2828	2833	2838	2843	2848	2853	2858	2863	2868	2873	2878	2883	2888	2893	2898	2903	2908	2913	2918	2923	2928	2933	2938	2943	2948	2953	2958	2963	2968	2973	2978	2983	2988	2993	2998	3003	3008	3013	3018	3023	3028	3033	3038	3043	3048	3053	3058	3063	3068	3073	3078	3083	3088	3093	3098	3103	3108	3113	3118	3123	3128	3133	3138	3143	3148	3153	3158	3163	3168	3173	3178	3183	3188	3193	3198	3203	3208	3213	3218	3223	3228	3233	3238	3243	3248	3253	3258	3263	3268	3273	3278	3283	3288	3293	3298	3303	3308	3313	3318	3323	3328	3333	3338	3343	3348	3353	3358	3363	3368	3373	3378	3383	3388	3393	3398	3403	3408	3413	3418	3423	3428	3433	3438	3443	3448	3453	3458	3463	3468	3473	3478	3483	3488	3493	3498	3503	3508	3513	3518	3523	3528	3533	3538	3543	3548	3553	3558	3563	3568	3573	3578	3583	3588	3593	3598	3603	3608	3613	3618	3623	3628	3633	3638	3643	3648	3653	3658	3663	3668	3673	3678	3683	3688	3693	3698	3703	3708	3713	3718	3723	3728	3733	3738	3743	3748	3753	3758	3763	3768	3773	3778	3783	3788	3793	3798	3803	3808	3813	3818	3823	3828	3833	3838	3843	3848	3853	3858	3863	3868	3873	3878	3883	3888	3893	3898	3903	3908	3913	3918	3923	3928	3933	3938	3943	3948	3953	3958	3963	3968	3973	3978	3983	3988	3993	3998	4003	4008	4013	4018	4023	4028	4033	4038	4043	4048	4053	4058	4063	4068	4073	4078	4083	4088	4093	4098	4103	4108	4113	4118	4123	4128	4133	4138	4143	4148	4153	4158	4163	4168	4173	4178	4183	4188	4193	4198	4203	4208	4213	4218	4223	4228	4233	4238	4243	4248	4253	4258	4263	4268	4273	4278	4283	4288	4293	4298	4303	4308	4313	4318	4323	4328	4333	4338	4343	4348	4353	4358	4363	4368	4373	4378	4383	4388	4393	4398	44

C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING

SERIES

PLAIN SHANK **HPI91**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

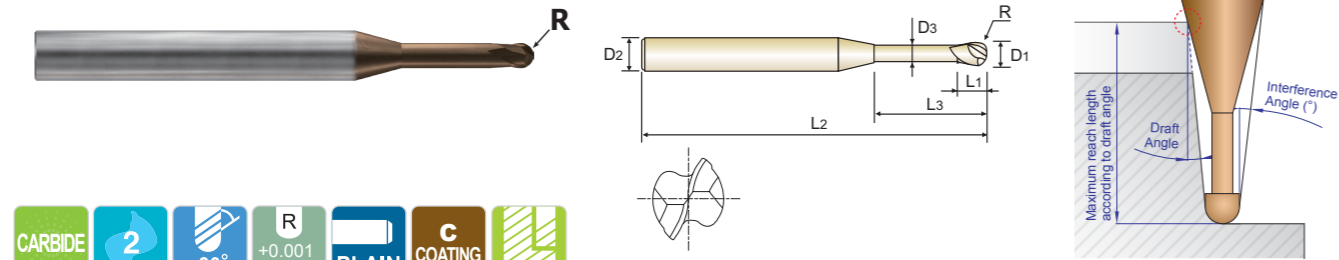

P. 38~48

Unit : mm

EDP No.	Radius of Ball Nose R	Mill Diameter D ₁	Shank Diameter D ₂	Length of Cut L ₁	Length Below Shank L ₃	Overall Length L ₂	Neck Diameter D ₃	Interference Angle (°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91868	R1.0	2.0	4	1.5	30	70	1.95	1.74	31.07	32.12	33.24	-	-
HPI91869	R1.0	2.0	4	1.5	35	70	1.95	1.51	36.24	37.47	38.79	-	-
HPI91870	R1.0	2.0	4	1.5	40	90	1.95	1.34	41.41	42.82	-	-	-
HPI91871	R1.0	2.0	4	2	5	40	1.95	7.28	5.23	5.38	5.54	5.71	6.09
HPI91872	R1.0	2.0	4	2	5	50	1.95	7.28	5.23	5.38	5.54	5.71	6.09
HPI91873	R1.0	2.0	6	1.5	4	50	1.95	10.73	4.20	4.31	4.43	4.56	4.85
HPI91874	R1.0	2.0	6	1.5	6	50	1.95	9.05	6.26	6.45	6.64	6.86	7.33
HPI91875	R1.0	2.0	6	1.5	8	50	1.95	7.82	8.33	8.59	8.86	9.16	9.82
HPI91876	R1.0	2.0	6	1.5	10	50	1.95	6.89	10.40	10.73	11.08	11.46	12.30
HPI91877	R1.0	2.0	6	1.5	16	60	1.95	5.07	16.60	17.15	17.73	18.36	19.76
HPI91878	R1.0	2.0	6	1.5	25	65	1.95	3.63	25.90	26.77	27.70	28.70	30.95
HPI91879	R1.0	2.0	6	2	5	50	1.95	9.82	5.23	5.38	5.54	5.71	6.09
HPI91025	R1.25	2.5	4	2.3	6	45	2.4	5.54	6.35	6.53	6.72	6.93	7.39
HPI91880	R1.25	2.5	4	2.3	8	45	2.4	4.41	8.42	8.67	8.94	9.23	9.87
HPI91881	R1.25	2.5	4	2.3	10	45	2.4	3.66	10.49	10.81	11.15	11.53	12.36
HPI91882	R1.25	2.5	4	2.3	15	50	2.4	2.57	15.66	16.16	16.70	17.28	-
HPI91883	R1.25	2.5	4	2.3	20	55	2.4	1.98	20.82	21.51	22.24	-	-
HPI91884	R1.25	2.5	4	2.3	25	65	2.4	1.61	25.99	26.85	27.78	-	-
HPI91885	R1.25	2.5	4	2.3	30	70	2.4	1.35	31.16	32.20	-	-	-
HPI91886	R1.25	2.5	4	2.3	35	70	2.4	1.17	36.33	37.55	-	-	-
HPI91030	R1.5	3.0	4	3	8	40	2.85	3.31	8.51	8.75	9.01	9.30	9.93
HPI91887	R1.5	3.0	6	2.5	6	60	2.85	8.22	6.44	6.61	6.80	7.00	7.44
HPI91888	R1.5	3.0	6	2.5	8	60	2.85	6.91	8.51	8.75	9.01	9.30	9.93
HPI91889	R1.5	3.0	6	2.5	10	60	2.85	5.96	10.58	10.89	11.23	11.60	12.41
HPI91890	R1.5	3.0	6	2.5	12	60	2.85	5.23	12.64	13.03	13.45	13.90	14.90
HPI91891	R1.5	3.0	6	2.5	14	60	2.85	4.67	14.71	15.17	15.66	16.20	17.39

NEXT PAGE ▶

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4


◎ : Excellent ○ : Good

ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
HRC	13	25	28	32	38	44	45	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118	123	128	133	138	143	148	153	158	163	168	173	178	183	188	193	198	203	208	213	218	223	228	233	238	243	248	253	258	263	268	273	278	283	288	293	298	303	308	313	318	323	328	333	338	343	348	353	358	363	368	373	378	383	388	393	398	403	408	413	418	423	428	433	438	443	448	453	458	463	468	473	478	483	488	493	498	503	508	513	518	523	528	533	538	543	548	553	558	563	568	573	578	583	588	593	598	603	608	613	618	623	628	633	638	643	648	653	658	663	668	673	678	683	688	693	698	703	708	713	718	723	728	733	738	743	748	753	758	763	768	773	778	783	788	793	798	803	808	813	818	823	828	833	838	843	848	853	858	863	868	873	878	883	888	893	898	903	908	913	918	923	928	933	938	943	948	953	958	963	968	973	978	983	988	993	998	1003	1008	1013	1018	1023	1028	1033	1038	1043	1048	1053	1058	1063	1068	1073	1078	1083	1088	1093	1098	1103	1108	1113	1118	1123	1128	1133	1138	1143	1148	1153	1158	1163	1168	1173	1178	1183	1188	1193	1198	1203	1208	1213	1218	1223	1228	1233	1238	1243	1248	1253	1258	1263	1268	1273	1278	1283	1288	1293	1298	1303	1308	1313	1318	1323	1328	1333	1338	1343	1348	1353	1358	1363	1368	1373	1378	1383	1388	1393	1398	1403	1408	1413	1418	1423	1428	1433	1438	1443	1448	1453	1458	1463	1468	1473	1478	1483	1488	1493	1498	1503	1508	1513	1518	1523	1528	1533	1538	1543	1548	1553	1558	1563	1568	1573	1578	1583	1588	1593	1598	1603	1608	1613	1618	1623	1628	1633	1638	1643	1648	1653	1658	1663	1668	1673	1678	1683	1688	1693	1698	1703	1708	1713	1718	1723	1728	1733	1738	1743	1748	1753	1758	1763	1768	1773	1778	1783	1788	1793	1798	1803	1808	1813	1818	1823	1828	1833	1838	1843	1848	1853	1858	1863	1868	1873	1878	1883	1888	1893	1898	1903	1908	1913	1918	1923	1928	1933	1938	1943	1948	1953	1958	1963	1968	1973	1978	1983	1988	1993	1998	2003	2008	2013	2018	2023	2028	2033	2038	2043	2048	2053	2058	2063	2068	2073	2078	2083	2088	2093	2098	2103	2108	2113	2118	2123	2128	2133	2138	2143	2148	2153	2158	2163	2168	2173	2178	2183	2188	2193	2198	2203	2208	2213	2218	2223	2228	2233	2238	2243	2248	2253	2258	2263	2268	2273	2278	2283	2288	2293	2298	2303	2308	2313	2318	2323	2328	2333	2338	2343	2348	2353	2358	2363	2368	2373	2378	2383	2388	2393	2398	2403	2408	2413	2418	2423	2428	2433	2438	2443	2448	2453	2458	2463	2468	2473	2478	2483	2488	2493	2498	2503	2508	2513	2518	2523	2528	2533	2538	2543	2548	2553	2558	2563	2568	2573	2578	2583	2588	2593	2598	2603	2608	2613	2618	2623	2628	2633	2638	2643	2648	2653	2658	2663	2668	2673	2678	2683	2688	2693	2698	2703	2708	2713	2718	2723	2728	2733	2738	2743	2748	2753	2758	2763	2768	2773	2778	2783	2788	2793	2798	2803	2808	2813	2818	2823	2828	2833	2838	2843	2848	2853	2858	2863	2868	2873	2878	2883	2888	2893	2898	2903	2908	2913	2918	2923	2928	2933	2938	2943	2948	2953	2958	2963	2968	2973	2978	2983	2988	2993	2998	3003	3008	3013	3018	3023	3028	3033	3038	3043	3048	3053	3058	3063	3068	3073	3078	3083	3088	3093	3098	3103	3108	3113	3118	3123	3128	3133	3138	3143	3148	3153	3158	3163	3168	3173	3178	3183	3188	3193	3198	3203	3208	3213	3218	3223	3228	3233	3238	3243	3248	3253	3258	3263	3268	3273	3278	3283	3288	3293	3298	3303	3308	3313	3318	3323	3328	3333	3338	3343	3348	3353	3358	3363	3368	3373	3378	3383	3388	3393	3398	3403	3408	3413	3418	3423	3428	3433	3438	3443	3448	3453	3458	3463	3468	3473	3478	3483	3488	3493	3498	3503	3508	3513	3518	3523	3528	3533	3538	3543	3548	3553	3558	3563	3568	3573	3578	3583	3588	3593	3598	3603	3608	3613	3618	3623	3628	3633	3638	3643	3648	3653	3658	3663	3668	3673	3678	3683	3688	3693	3698	3703	3708	3713	3718	3723	3728	3733	3738	3743	3748	3753	3758	3763	3768	3773	3778	3783	3788	3793	3798	3803	3808	3813	3818	3823	3828	3833	3838	3843	3848	3853	3858	3863	3868	3873	3878	3883	3888	3893	3898	3903	3908	3913	3918	3923	3928	3933	3938	3943	3948	3953	3958	3963	3968	3973	3978	3983	3988	3993	3998	4003	4008	4013	4018	4023	4028	4033	4038	4043	4048	4053	4058	4063	4068	4073	4078	4083	4088	4093	4098	4103	4108	4113	4118	4123	4128	4133	4138	4143	4148	4153	4158	4163	4168	4173	4178	4183	4188	4193	4198	4203	4208	4213	4218	4223	4228	4233	4238	4243	4248	4253	4258	4263	4268	4273	4278	4283	4288	4293	4298	4303	4308	4313	4318	4323	4328	4333	4338	434

**C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING**

SERIES
PLAIN SHANK HPI91

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

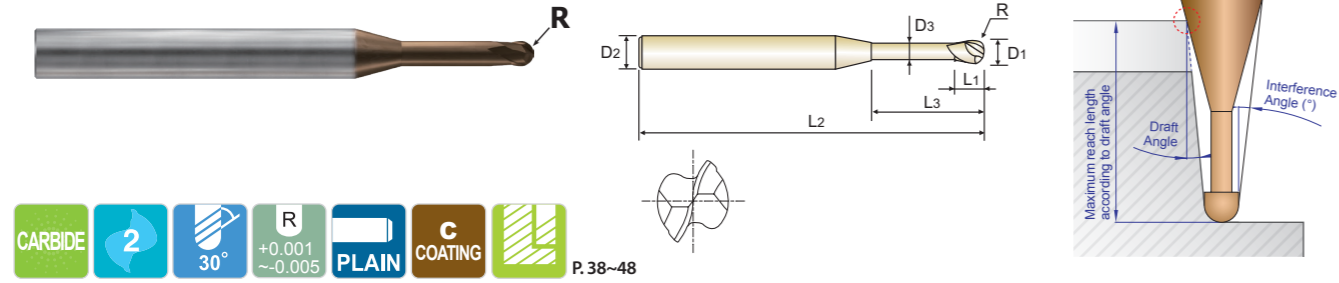

CARBIDE 2 30° +0.001~-0.005 PLAIN COATING P.38~48

Unit : mm

EDP No.	Radius of Ball Nose R	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3	Interference Angle (°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI91717	R2.0	4.0	6	3	50	100	3.85	1.10	51.91	53.64	-	-	-
HPI91718	R2.0	4.0	6	4	10	40	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91719	R2.0	4.0	6	4	10	60	3.85	4.76	10.56	10.86	11.18	11.52	12.29
HPI91050	R2.5	5.0	6	3.5	10	70	4.85	2.97	10.54	10.82	11.12	11.45	-
HPI91060	R3.0	6.0	6	6	10	70	5.85	0.00	-	-	-	-	-
HPI91720	R2.5	5.0	6	3.5	15	70	4.85	1.96	15.71	16.17	16.66	-	-
HPI91721	R2.5	5.0	6	3.5	20	70	4.85	1.46	20.88	21.52	-	-	-
HPI91722	R2.5	5.0	6	3.5	25	70	4.85	1.16	26.05	26.87	-	-	-
HPI91723	R2.5	5.0	6	3.5	30	80	4.85	0.97	31.22	-	-	-	-
HPI91724	R2.5	5.0	6	3.5	40	90	4.85	0.72	41.55	-	-	-	-
HPI91725	R2.5	5.0	6	5	12	45	4.85	2.46	12.61	12.96	13.34	13.75	-
HPI91726	R2.5	5.0	6	5	12	60	4.85	2.46	12.61	12.96	13.34	13.75	-
HPI91727	R3.0	6.0	6	6	15	45	5.85	0.00	-	-	-	-	-
HPI91728	R3.0	6.0	6	6	15	60	5.85	0.00	-	-	-	-	-
HPI91729	R3.0	6.0	6	6	15	70	5.85	0.00	-	-	-	-	-
HPI91730	R3.0	6.0	6	6	20	70	5.85	0.00	-	-	-	-	-
HPI91731	R3.0	6.0	6	6	25	70	5.85	0.00	-	-	-	-	-
HPI91732	R3.0	6.0	6	6	30	80	5.85	0.00	-	-	-	-	-
HPI91733	R3.0	6.0	6	6	35	85	5.85	0.00	-	-	-	-	-
HPI91734	R3.0	6.0	6	6	40	90	5.85	0.00	-	-	-	-	-
HPI91735	R3.0	6.0	6	6	50	120	5.85	0.00	-	-	-	-	-
HPI91736	R3.0	6.0	6	6	60	120	5.85	0.00	-	-	-	-	-

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
+0.001~-0.005	0~-0.010	h4

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend	○										○				○						

ISO Material Description	N										S							H						
	Aluminum-wrought alloy		Aluminum-cast alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc	15	30	25	38	34	45-49	50-55	56-60	61-65	66-70	42	55	55	55	55	55	55	421-469	481-500	577-654	670-739	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-500	577-654	670-739	400	550	550
Recommend	○										◎							◎						

**C-COATED SOLID CARBIDE END MILLS
2 FLUTE BALL NOSE for RIB PROCESSING with TAPER NECK**

SERIES
PLAIN SHANK HPI92

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

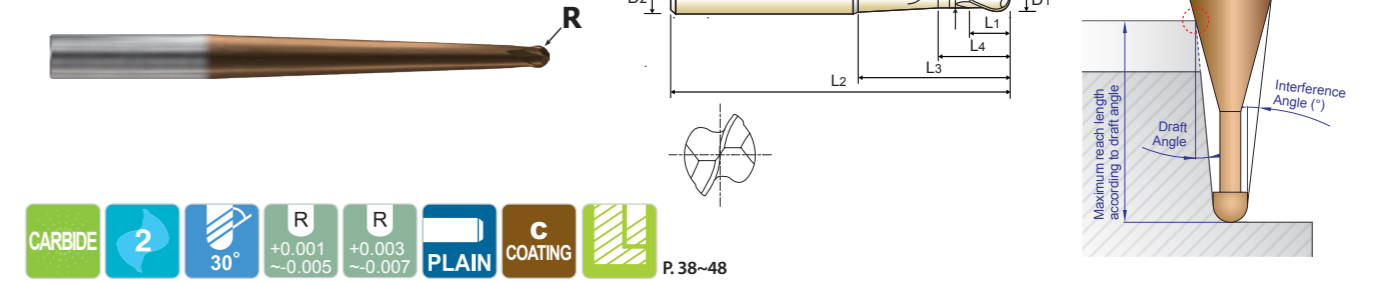

CARBIDE 2 30° +0.001~-0.005 +0.003~-0.007 PLAIN COATING P.38~48

Unit : mm

EDP No.	Radius of Ball Nose R	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3	Neck Taper Angle(°)	Under Neck Parallel Length L4	Interference Angle (°)	Maximum reach lengths according to draft angle				
											0.5°	1°	1.5°	2°	3°
HPI92996	R0.5	1.0	4	0.75	20	70	0.95	2	2.75	3.74	4.45	6.43	12.36	20.44	22.06
HPI92997	R0.5	1.0	4	0.75	20	70	0.95	3	2.75	3.93	3.77	4.59	5.95	8.67	20.66
HPI92998	R0.5	1.0	4	0.75	25	70	0.95	0.5	2.75	2.91	25.17	26.03	26.95	27.95	-
HPI92999	R0.5	1.0	4	0.75	25	70	0.95	1	2.75	2.99	7.86	25.26	26.15	27.11	-
HPI92801	R0.5	1.0	4	0.75	25	70	0.95	1.5	2.75	3.06	5.31	10.11	25.35	26.28	28.37
HPI92802	R0.5	1.0	4	0.75	30	70	0.95	0.5	2.75	2.50	30.17	31.21	32.31	33.51	-
HPI92803	R0.5	1.0	4	0.75	30	70	0.95	1	2.75	2.57	7.86	30.26	31.33	32.49	-
HPI92804	R0.5	1.0	4	0.75	30	70	0.95	1.5	2.75	2.64	5.31	10.11	30.35	31.47	-
HPI92805	R0.5	1.0	4	0.75	30	70	0.95	2	2.75	2.71	4.45	6.43	12.36	30.44	-
HPI92896	R0.5	1.0	6	0.75	30	70	0.95	3	2.75	4.26	3.77	4.59	5.95	8.67	30.66
HPI92015	R0.75	1.5	4	1.1	10	60	1.45	0.5	3.1	5.18	10.18	10.50	10.86	11.24	12.09
HPI92806	R0.75	1.5	4	1.1	10	60	1.45	1	3.1	5.27	8.31	10.26	10.61	10.98	11.81
HPI92807	R0.75	1.5	4	1.1	10	60	1.45	1.5	3.1	5.36	5.71	10.02	10.36	10.72	11.53
HPI92808	R0.75	1.5	4	1.1	10	60	1.45	2	3.1	5.45	4.84	6.88	10.11	10.46	11.25
HPI92809	R0.75	1.5	4	1.1	15	60	1.45	0.5	3.1	3.84	15.18	15.68	16.22	16.80	18.10
HPI92810	R0.75	1.5	4	1.1	15	60	1.45	1	3.1	3.92	8.31	15.26	15.79	16.35	17.62
HPI92811	R0.75	1.5	4	1.1	15	60	1.45	1.5	3.1	4.01	5.71	10.66	15.36	15.91	17.14
HPI92812	R0.75	1.5	4	1.1	15	60	1.45	2	3.1	4.10	4.84	6.88	13.01	15.46	16.65
HPI92813	R0.75	1.5	4	1.1	20	70	1.45	0.5	3.1	3.05	20.18	20.85	21.58	22.36	24.11
HPI92814	R0.75	1.5	4	1.1	20	70	1.45	1	3.1	3.12	8.31	20.26	20.97	21.73	23.43
HPI92815	R0.75	1.5	4	1.1	20	70	1.45	1.5	3.1	3.20	5.71	10.66	20.36	21.09	22.74
HPI92816	R0.75	1.5	4	1.1	20	70	1.45	2	3.1	3.28	4.84	6.88	13.01	20.46	22.06
HPI92817	R0.75	1.5	4	1.1	25	70	1.45	0.5	3.1	2.53	25.18	26.03	26.94	27.92	-
HPI92818	R0.75	1.5	4	1.1	25	70	1.45	1	3.1	2.59	8.31	25.26	26.15	27.10	-
HPI92819	R0.75	1.5	4	1.1	30	70	1.45	0.5	3.1	2.16	30.18	31.20	32.30	33.48	-
HPI92820	R0.75	1.5	4	1.1	30	70	1.45	1	3.1	2.22	8.31	30.26	31.33	32.48	-

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	+0.001~-0.005	0~-0.010	h4
over R3	+0.003~-0.007	0~-0.012	* Shank Dia.>ø6 : h5

NEXT PAGE ▶

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20
HRc	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230
Recommend	○										○				○						

ISO Material Description	N										S							H						
	Aluminum-wrought alloy		Aluminum-cast alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc	15	30	25	38	34	45-49	50-55	56-60	61-65	66-70	42	55	55	55	55	55	55	421-469	481-500	577-654	670-739	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-500	577-654	670-739	400	550	550
Recommend	○										◎							◎						

C-COATED SOLID CARBIDE END MILLS 2 FLUTE CORNER RADIUS for RIB PROCESSING

SERIES
PLAIN SHANK **HPI89**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

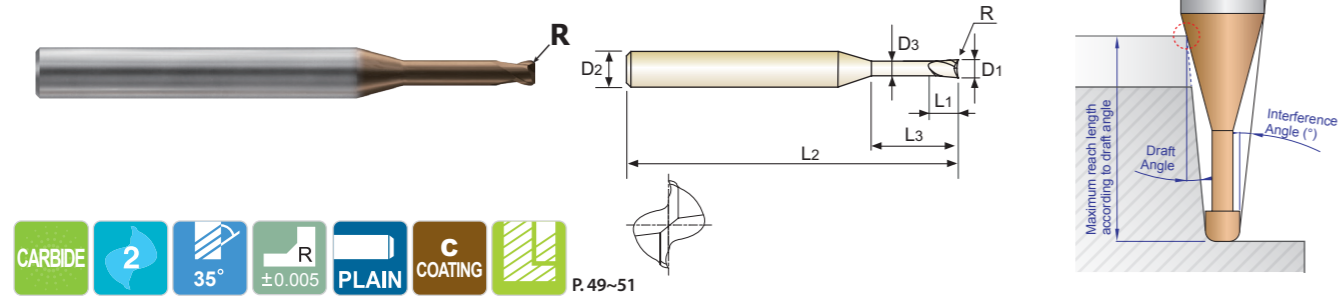

Unit : mm


EDP No.	Corner Radius R	Mill Diameter D ₁	Shank Diameter D ₂	Length of Cut L ₁	Length Below Shank L ₃	Overall Length L ₂	Neck Diameter D ₃	Interference Angle (°)	Maximum reach lengths according to draft angle				
									0.5°	1°	1.5°	2°	3°
HPI89846	R0.3	3.0	6	2.5	20	65	2.85	3.36	20.95	21.67	22.44	23.27	25.14
HPI89847	R0.5	3.0	6	2.5	20	65	2.85	3.38	20.95	21.66	22.42	23.24	25.09
HPI89848	R0.2	3.0	6	2.5	30	75	2.85	2.41	31.29	32.38	33.54	34.79	-
HPI89849	R0.3	3.0	6	2.5	30	75	2.85	2.41	31.29	32.37	33.53	34.77	-
HPI89850	R0.5	3.0	6	2.5	30	75	2.85	2.43	31.28	32.36	33.51	34.74	-
HPI89851	R0.2	3.0	6	2.5	35	80	2.85	2.11	36.46	37.72	39.08	40.54	-
HPI89852	R0.5	3.0	6	2.5	35	80	2.85	2.13	36.45	37.70	39.05	40.49	-

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
±0.005	0~-0.010	h4

C-COATED SOLID CARBIDE END MILLS 2 FLUTE SQUARE for RIB PROCESSING

SERIES
PLAIN SHANK **HPI88**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

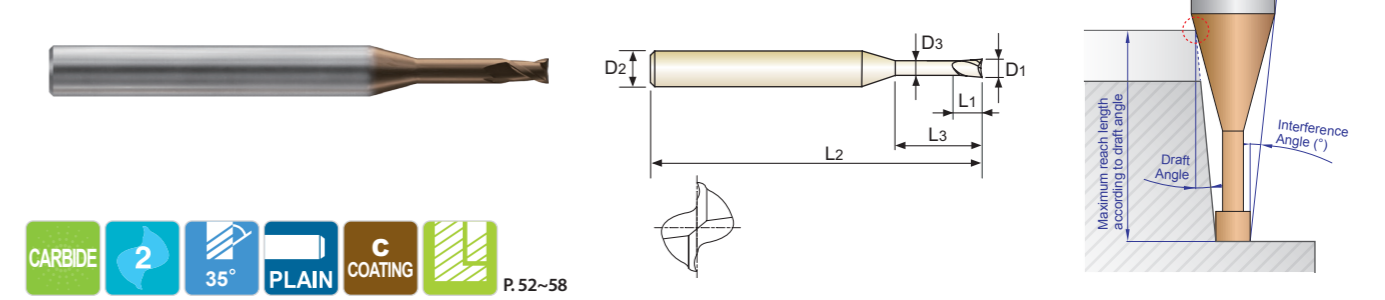

Unit : mm

EDP No.	Mill Diameter D ₁	Shank Diameter D ₂	Length of Cut L ₁	Length Below Shank L ₃	Overall Length L ₂	Neck Diameter D ₃	Interference Angle (°)	Maximum reach lengths according to draft angle				
								0.5°	1°	1.5°	2°	3°
HPI88001	0.1	4	0.08	0.3	45	0.085	14.38	0.36	0.38	0.40	0.43	0.49
HPI88901	0.1	4	0.08	0.5	45	0.085	14.03	0.57	0.60	0.64	0.68	0.77
HPI88902	0.1	4	0.08	0.75	45	0.085	13.61	0.83	0.88	0.93	0.99	1.13
HPI88903	0.1	4	0.08	1	45	0.085	13.21	1.10	1.16	1.22	1.30	1.48
HPI880015	0.15	4	0.12	0.3	45	0.135	14.37	0.36	0.38	0.40	0.43	0.49
HPI88904	0.15	4	0.12	0.5	45	0.135	14.01	0.57	0.60	0.64	0.68	0.77
HPI88905	0.15	4	0.12	0.75	45	0.135	13.59	0.83	0.88	0.93	0.99	1.13
HPI88906	0.15	4	0.12	1	45	0.135	13.19	1.10	1.16	1.22	1.30	1.48
HPI88907	0.15	4	0.12	1.5	45	0.135	12.46	1.62	1.71	1.81	1.92	2.19
HPI88002	0.2	4	0.15	0.5	45	0.17	13.95	0.62	0.65	0.69	0.73	0.83
HPI88908	0.2	4	0.15	0.75	45	0.17	13.53	0.88	0.93	0.98	1.04	1.19
HPI88909	0.2	4	0.15	1	45	0.17	13.13	1.14	1.20	1.27	1.35	1.54
HPI88910	0.2	4	0.15	1.5	45	0.17	12.39	1.67	1.76	1.86	1.98	2.26
HPI88911	0.2	4	0.15	2	45	0.17	11.73	2.19	2.31	2.45	2.60	2.97
HPI88912	0.2	4	0.15	2.5	45	0.17	11.14	2.72	2.87	3.04	3.22	3.68
HPI88913	0.2	4	0.15	3	45	0.17	10.61	3.25	3.42	3.62	3.85	4.39
HPI88003	0.3	4	0.25	1	45	0.27	13.08	1.14	1.20	1.27	1.35	1.54
HPI88914	0.3	4	0.25	1.5	45	0.27	12.33	1.67	1.76	1.86	1.98	2.26
HPI88915	0.3	4	0.25	2	45	0.27	11.67	2.19	2.31	2.45	2.60	2.97
HPI88916	0.3	4	0.25	2.5	45	0.27	11.06	2.72	2.87	3.04	3.22	3.68
HPI88917	0.3	4	0.25	3	45	0.27	10.52	3.25	3.42	3.62	3.85	4.39
HPI88004	0.4	4	0.3	1	45	0.37	13.04	1.14	1.20	1.27	1.35	1.54
HPI88918	0.4	4	0.3	1.5	45	0.37	12.27	1.67	1.76	1.86	1.98	2.26
HPI88919	0.4	4	0.3	2	45	0.37	11.59	2.19	2.31	2.45	2.60	2.97
HPI88920	0.4	4	0.3	2.5	45	0.37	10.98	2.72	2.87	3.04	3.22	3.68
HPI88921	0.4	4	0.3	3	45	0.37	10.44	3.25	3.42	3.62	3.85	4.39

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

NEXT PAGE ▶

◎ : Excellent ○ : Good

ISO Material Description	P										M			K								
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230	
Recommend					○					○	○											

ISO Material Description	N					S					H														
	Aluminum-wrought alloy		Aluminum-cast alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel			Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	400	400	550	
Recommend																		◎	◎	◎	◎	◎	◎	◎	◎

◎ : Excellent ○ : Good

ISO Material Description	P										M			K										
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel		Grey cast iron	Nodular cast iron	Malleable cast iron						
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20			
HRc	13	25	28	32	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25	21	21			
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend					○					○	○													


ISO Material Description	N					S					H														
	Aluminum-wrought alloy		Aluminum-cast alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel			Chilled Cast Iron	Hardened Cast Iron								
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41	
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	400	400	550	
Recommend																		◎	◎	◎	◎	◎	◎	◎	◎

C-COATED SOLID CARBIDE END MILLS
2 FLUTE SQUARE for RIB PROCESSING

SERIES

PLAIN SHANK **HPI88**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

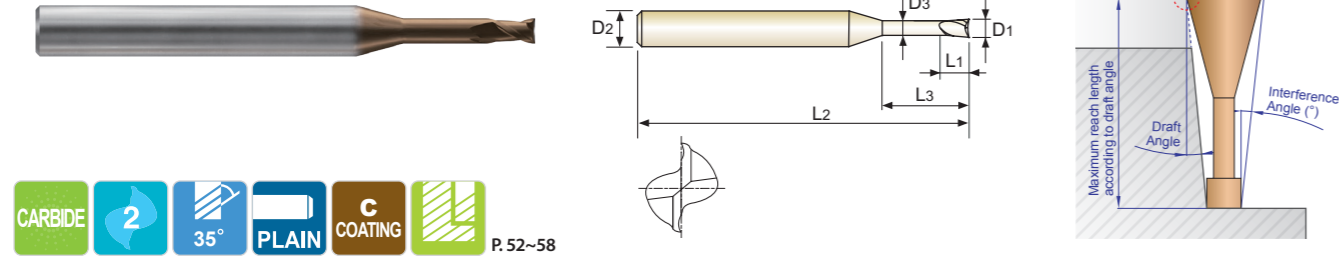

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
								0.5°	1°	1.5°	2°	3°
HPI88922	0.4	4	0.3	3.5	45	0.37	9.94	3.77	3.98	4.21	4.47	5.10
HPI88923	0.4	4	0.3	4	45	0.37	9.49	4.30	4.53	4.80	5.09	5.81
HPI88924	0.4	4	0.3	5	45	0.37	8.69	5.35	5.64	5.97	6.34	7.24
HPI88925	0.4	4	0.3	6	45	0.37	8.02	6.40	6.75	7.15	7.59	8.66
HPI88926	0.4	4	0.3	8	45	0.37	6.95	8.51	8.97	9.50	10.08	11.48
HPI88927	0.4	4	0.3	10	45	0.37	6.13	10.61	11.19	11.84	12.58	13.82
HPI88005	0.5	4	0.4	1	45	0.45	12.93	1.20	1.27	1.34	1.42	1.62
HPI88928	0.5	4	0.4	1.5	45	0.45	12.16	1.73	1.82	1.93	2.05	2.34
HPI88929	0.5	4	0.4	2	45	0.45	11.47	2.25	2.38	2.52	2.67	3.05
HPI88930	0.5	4	0.4	2.5	45	0.45	10.86	2.78	2.93	3.10	3.29	3.76
HPI88931	0.5	4	0.4	3	45	0.45	10.31	3.31	3.49	3.69	3.92	4.47
HPI88932	0.5	4	0.4	3.5	45	0.45	9.81	3.83	4.04	4.28	4.54	5.18
HPI88933	0.5	4	0.4	4	45	0.45	9.35	4.36	4.60	4.86	5.16	5.89
HPI88934	0.5	4	0.4	4.5	45	0.45	8.94	4.88	5.15	5.45	5.79	6.60
HPI88935	0.5	4	0.4	5	45	0.45	8.56	5.41	5.71	6.04	6.41	7.32
HPI88936	0.5	4	0.4	6	45	0.45	7.89	6.46	6.82	7.21	7.66	8.74
HPI88937	0.5	4	0.4	7	45	0.45	7.32	7.51	7.93	8.39	8.91	10.16
HPI88938	0.5	4	0.4	8	50	0.45	6.82	8.57	9.04	9.56	10.15	11.47
HPI88939	0.5	4	0.4	9	50	0.45	6.39	9.62	10.15	10.74	11.40	12.64
HPI88940	0.5	4	0.4	10	50	0.45	6.01	10.67	11.26	11.91	12.65	13.80
HPI88006	0.6	4	0.5	1.5	45	0.55	12.09	1.73	1.82	1.93	2.05	2.34
HPI88941	0.6	4	0.5	2	45	0.55	11.39	2.25	2.38	2.52	2.67	3.05
HPI88942	0.6	4	0.5	3	45	0.55	10.21	3.31	3.49	3.69	3.92	4.47
HPI88943	0.6	4	0.5	4	45	0.55	9.25	4.36	4.60	4.86	5.16	5.89
HPI88944	0.6	4	0.5	5	45	0.55	8.45	5.41	5.71	6.04	6.41	7.32
HPI88945	0.6	4	0.5	6	45	0.55	7.78	6.46	6.82	7.21	7.66	8.74

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

NEXT PAGE ▶

◎ : Excellent ○ : Good



ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
HRC	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118	123	128	133	138	143	148	153	158	163	168	173	178	183	188	193	198	203	208	213	218	223	228	233	238	243	248	253	258	263	268	273	278	283	288	293	298	303	308	313	318	323	328	333	338	343	348	353	358	363	368	373	378	383	388	393	398	403	408	413	418	423	428	433	438	443	448	453	458	463	468	473	478	483	488	493	498	503	508	513	518	523	528	533	538	543	548	553	558	563	568	573	578	583	588	593	598	603	608	613	618	623	628	633	638	643	648	653	658	663	668	673	678	683	688	693	698	703	708	713	718	723	728	733	738	743	748	753	758	763	768	773	778	783	788	793	798	803	808	813	818	823	828	833	838	843	848	853	858	863	868	873	878	883	888	893	898	903	908	913	918	923	928	933	938	943	948	953	958	963	968	973	978	983	988	993	998	1003	1008	1013	1018	1023	1028	1033	1038	1043	1048	1053	1058	1063	1068	1073	1078	1083	1088	1093	1098	1103	1108	1113	1118	1123	1128	1133	1138	1143	1148	1153	1158	1163	1168	1173	1178	1183	1188	1193	1198	1203	1208	1213	1218	1223	1228	1233	1238	1243	1248	1253	1258	1263	1268	1273	1278	1283	1288	1293	1298	1303	1308	1313	1318	1323	1328	1333	1338	1343	1348	1353	1358	1363	1368	1373	1378	1383	1388	1393	1398	1403	1408	1413	1418	1423	1428	1433	1438	1443	1448	1453	1458	1463	1468	1473	1478	1483	1488	1493	1498	1503	1508	1513	1518	1523	1528	1533	1538	1543	1548	1553	1558	1563	1568	1573	1578	1583	1588	1593	1598	1603	1608	1613	1618	1623	1628	1633	1638	1643	1648	1653	1658	1663	1668	1673	1678	1683	1688	1693	1698	1703	1708	1713	1718	1723	1728	1733	1738	1743	1748	1753	1758	1763	1768	1773	1778	1783	1788	1793	1798	1803	1808	1813	1818	1823	1828	1833	1838	1843	1848	1853	1858	1863	1868	1873	1878	1883	1888	1893	1898	1903	1908	1913	1918	1923	1928	1933	1938	1943	1948	1953	1958	1963	1968	1973	1978	1983	1988	1993	1998	2003	2008	2013	2018	2023	2028	2033	2038	2043	2048	2053	2058	2063	2068	2073	2078	2083	2088	2093	2098	2103	2108	2113	2118	2123	2128	2133	2138	2143	2148	2153	2158	2163	2168	2173	2178	2183	2188	2193	2198	2203	2208	2213	2218	2223	2228	2233	2238	2243	2248	2253	2258	2263	2268	2273	2278	2283	2288	2293	2298	2303	2308	2313	2318	2323	2328	2333	2338	2343	2348	2353	2358	2363	2368	2373	2378	2383	2388	2393	2398	2403	2408	2413	2418	2423	2428	2433	2438	2443	2448	2453	2458	2463	2468	2473	2478	2483	2488	2493	2498	2503	2508	2513	2518	2523	2528	2533	2538	2543	2548	2553	2558	2563	2568	2573	2578	2583	2588	2593	2598	2603	2608	2613	2618	2623	2628	2633	2638	2643	2648	2653	2658	2663	2668	2673	2678	2683	2688	2693	2698	2703	2708	2713	2718	2723	2728	2733	2738	2743	2748	2753	2758	2763	2768	2773	2778	2783	2788	2793	2798	2803	2808	2813	2818	2823	2828	2833	2838	2843	2848	2853	2858	2863	2868	2873	2878	2883	2888	2893	2898	2903	2908	2913	2918	2923	2928	2933	2938	2943	2948	2953	2958	2963	2968	2973	2978	2983	2988	2993	2998	3003	3008	3013	3018	3023	3028	3033	3038	3043	3048	3053	3058	3063	3068	3073	3078	3083	3088	3093	3098	3103	3108	3113	3118	3123	3128	3133	3138	3143	3148	3153	3158	3163	3168	3173	3178	3183	3188	3193	3198	3203	3208	3213	3218	3223	3228	3233	3238	3243	3248	3253	3258	3263	3268	3273	3278	3283	3288	3293	3298	3303	3308	3313	3318	3323	3328	3333	3338	3343	3348	3353	3358	3363	3368	3373	3378	3383	3388	3393	3398	3403	3408	3413	3418	3423	3428	3433	3438	3443	3448	3453	3458	3463	3468	3473	3478	3483	3488	3493	3498	3503	3508	3513	3518	3523	3528	3533	3538	3543	3548	3553	3558	3563	3568	3573	3578	3583	3588	3593	3598	3603	3608	3613	3618	3623	3628	3633	3638	3643	3648	3653	3658	3663	3668	3673	3678	3683	3688	3693	3698	3703	3708	3713	3718	3723	3728	3733	3738	3743	3748	3753	3758	3763	3768	3773	3778	3783	3788	3793	3798	3803	3808	3813	3818	3823	3828	3833	3838	3843	3848	3853	3858	3863	3868	3873	3878	3883	3888	3893	3898	3903	3908	3913	3918	3923	3928	3933	3938	3943	3948	3953	3958	3963	3968	3973	3978	3983	3988	3993	3998	4003	4008	4013	4018	4023	4028	4033	4038	4043	4048	4053	4058	4063	4068	4073	4078	4083	4088	4093	4098	4103	4108	4113	4118	4123	4128	4133	4138	4143	4148	4153	4158	4163	4168	4173	4178	4183	4188	4193	4198	4203	4208	4213	4218	4223	4228	4233	4238	4243	4248	4253	4258	4263	4268	4273	4278	4283	4288	4293	4298	4303	4308	4313	4318	4323	4328	4333	4338	4343	4348	4353	4358	4363	4368	4373	4378	4383	4388	4393	4398	4403	4408	4413	4418	4423	4428	4433	4438	4443	4448	4453	4458	4463	4468	4473	4478	4483	4488	4493	4498	4503	4508	4513	4518	4523	4528	4533	

C-COATED SOLID CARBIDE END MILLS
2 FLUTE SQUARE for RIB PROCESSING

SERIES

PLAIN SHANK **HPI88**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

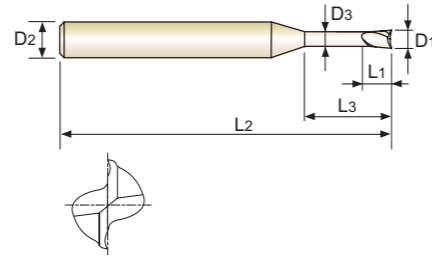

Unit : mm

EDP No.	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Length Below Shank L3	Overall Length L2	Neck Diameter D3	Interference Angle (°)	Maximum reach lengths according to draft angle				
								0.5°	1°	1.5°	2°	3°
HPI88969	1.0	4	0.8	22	60	0.95	3.10	23.29	24.57	25.40	26.07	27.53
HPI88012	1.2	4	1	6	50	1.15	7.05	6.30	6.52	6.75	7.01	7.57
HPI88970	1.2	4	1	8	50	1.15	6.00	8.37	8.66	8.97	9.31	10.06
HPI88971	1.2	4	1	10	50	1.15	5.22	10.43	10.80	11.19	11.61	12.55
HPI88972	1.2	4	1	12	50	1.15	4.62	12.50	12.94	13.40	13.91	15.03
HPI88973	1.2	4	1	16	60	1.15	3.76	16.64	17.21	17.84	18.50	20.01
HPI88014	1.4	4	1.1	6	50	1.35	6.77	6.30	6.52	6.75	7.01	7.57
HPI88974	1.4	4	1.1	12	50	1.35	4.39	12.50	12.94	13.40	13.91	15.03
HPI88015	1.5	4	1.2	4	50	1.45	8.12	4.23	4.38	4.54	4.71	5.09
HPI88975	1.5	4	1.2	6	50	1.45	6.63	6.30	6.52	6.75	7.01	7.57
HPI88976	1.5	4	1.2	8	50	1.45	5.60	8.37	8.66	8.97	9.31	10.06
HPI88977	1.5	4	1.2	10	50	1.45	4.84	10.43	10.80	11.19	11.61	12.55
HPI88978	1.5	4	1.2	12	50	1.45	4.27	12.50	12.94	13.40	13.91	15.03
HPI88979	1.5	4	1.2	14	60	1.45	3.81	14.57	15.08	15.62	16.21	17.52
HPI88980	1.5	4	1.2	16	60	1.45	3.45	16.64	17.21	17.84	18.50	20.01
HPI88981	1.5	4	1.2	18	60	1.45	3.14	18.70	19.35	20.05	20.80	22.49
HPI88982	1.5	4	1.2	20	60	1.45	2.89	20.77	21.49	22.27	23.10	-
HPI88983	1.5	4	1.2	25	70	1.45	2.41	25.94	26.84	27.81	28.85	-
HPI88984	1.5	4	1.2	30	70	1.45	2.06	31.11	32.19	33.35	34.60	-
HPI88985	1.5	4	1.2	35	80	1.45	1.80	36.27	37.54	38.89	-	-
HPI88016	1.6	4	1.3	6	50	1.55	6.48	6.30	6.52	6.75	7.01	7.57
HPI88986	1.6	4	1.3	8	50	1.55	5.45	8.37	8.66	8.97	9.31	10.06
HPI88018	1.8	4	1.4	6	50	1.75	6.16	6.30	6.52	6.75	7.01	7.57
HPI88987	1.8	4	1.4	8	50	1.75	5.15	8.37	8.66	8.97	9.31	10.06
HPI88988	1.8	4	1.4	10	50	1.75	4.43	10.43	10.80	11.19	11.61	12.55
HPI88989	1.8	4	1.4	12	50	1.75	3.88	12.50	12.94	13.40	13.91	15.03

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

NEXT PAGE ▶

◎ : Excellent ○ : Good



ISO Material Description	P										M					K																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
HRC	13	25	28	32	38	44	48	52	58	63	68	73	78	83	88	93	98	103	108	113	118	123	128	133	138	143	148	153	158	163	168	173	178	183	188	193	198	203	208	213	218	223	228	233	238	243	248	253	258	263	268	273	278	283	288	293	298	303	308	313	318	323	328	333	338	343	348	353	358	363	368	373	378	383	388	393	398	403	408	413	418	423	428	433	438	443	448	453	458	463	468	473	478	483	488	493	498	503	508	513	518	523	528	533	538	543	548	553	558	563	568	573	578	583	588	593	598	603	608	613	618	623	628	633	638	643	648	653	658	663	668	673	678	683	688	693	698	703	708	713	718	723	728	733	738	743	748	753	758	763	768	773	778	783	788	793	798	803	808	813	818	823	828	833	838	843	848	853	858	863	868	873	878	883	888	893	898	903	908	913	918	923	928	933	938	943	948	953	958	963	968	973	978	983	988	993	998	1003	1008	1013	1018	1023	1028	1033	1038	1043	1048	1053	1058	1063	1068	1073	1078	1083	1088	1093	1098	1103	1108	1113	1118	1123	1128	1133	1138	1143	1148	1153	1158	1163	1168	1173	1178	1183	1188	1193	1198	1203	1208	1213	1218	1223	1228	1233	1238	1243	1248	1253	1258	1263	1268	1273	1278	1283	1288	1293	1298	1303	1308	1313	1318	1323	1328	1333	1338	1343	1348	1353	1358	1363	1368	1373	1378	1383	1388	1393	1398	1403	1408	1413	1418	1423	1428	1433	1438	1443	1448	1453	1458	1463	1468	1473	1478	1483	1488	1493	1498	1503	1508	1513	1518	1523	1528	1533	1538	1543	1548	1553	1558	1563	1568	1573	1578	1583	1588	1593	1598	1603	1608	1613	1618	1623	1628	1633	1638	1643	1648	1653	1658	1663	1668	1673	1678	1683	1688	1693	1698	1703	1708	1713	1718	1723	1728	1733	1738	1743	1748	1753	1758	1763	1768	1773	1778	1783	1788	1793	1798	1803	1808	1813	1818	1823	1828	1833	1838	1843	1848	1853	1858	1863	1868	1873	1878	1883	1888	1893	1898	1903	1908	1913	1918	1923	1928	1933	1938	1943	1948	1953	1958	1963	1968	1973	1978	1983	1988	1993	1998	2003	2008	2013	2018	2023	2028	2033	2038	2043	2048	2053	2058	2063	2068	2073	2078	2083	2088	2093	2098	2103	2108	2113	2118	2123	2128	2133	2138	2143	2148	2153	2158	2163	2168	2173	2178	2183	2188	2193	2198	2203	2208	2213	2218	2223	2228	2233	2238	2243	2248	2253	2258	2263	2268	2273	2278	2283	2288	2293	2298	2303	2308	2313	2318	2323	2328	2333	2338	2343	2348	2353	2358	2363	2368	2373	2378	2383	2388	2393	2398	2403	2408	2413	2418	2423	2428	2433	2438	2443	2448	2453	2458	2463	2468	2473	2478	2483	2488	2493	2498	2503	2508	2513	2518	2523	2528	2533	2538	2543	2548	2553	2558	2563	2568	2573	2578	2583	2588	2593	2598	2603	2608	2613	2618	2623	2628	2633	2638	2643	2648	2653	2658	2663	2668	2673	2678	2683	2688	2693	2698	2703	2708	2713	2718	2723	2728	2733	2738	2743	2748	2753	2758	2763	2768	2773	2778	2783	2788	2793	2798	2803	2808	2813	2818	2823	2828	2833	2838	2843	2848	2853	2858	2863	2868	2873	2878	2883	2888	2893	2898	2903	2908	2913	2918	2923	2928	2933	2938	2943	2948	2953	2958	2963	2968	2973	2978	2983	2988	2993	2998	3003	3008	3013	3018	3023	3028	3033	3038	3043	3048	3053	3058	3063	3068	3073	3078	3083	3088	3093	3098	3103	3108	3113	3118	3123	3128	3133	3138	3143	3148	3153	3158	3163	3168	3173	3178	3183	3188	3193	3198	3203	3208	3213	3218	3223	3228	3233	3238	3243	3248	3253	3258	3263	3268	3273	3278	3283	3288	3293	3298	3303	3308	3313	3318	3323	3328	3333	3338	3343	3348	3353	3358	3363	3368	3373	3378	3383	3388	3393	3398	3403	3408	3413	3418	3423	3428	3433	3438	3443	3448	3453	3458	3463	3468	3473	3478	3483	3488	3493	3498	3503	3508	3513	3518	3523	3528	3533	3538	3543	3548	3553	3558	3563	3568	3573	3578	3583	3588	3593	3598	3603	3608	3613	3618	3623	3628	3633	3638	3643	3648	3653	3658	3663	3668	3673	3678	3683	3688	3693	3698	3703	3708	3713	3718	3723	3728	3733	3738	3743	3748	3753	3758	3763	3768	3773	3778	3783	3788	3793	3798	3803	3808	3813	3818	3823	3828	3833	3838	3843	3848	3853	3858	3863	3868	3873	3878	3883	3888	3893	3898	3903	3908	3913	3918	3923	3928	3933	3938	3943	3948	3953	3958	3963	3968	3973	3978	3983	3988	3993	3998	4003	4008	4013	4018	4023	4028	4033	4038	4043	4048	4053	4058	4063	4068	4073	4078	4083	4088	4093	4098	4103	4108	4113	4118	4123	4128	4133	4138	4143	4148	4153	4158	4163	4168	4173	4178	4183	4188	4193	4198	4203	4208	4213	4218	4223	4228	4233	4238	4243	4248	4253	4258	4263	4268	4273	4278	4283	4288	4293	4298	4303	4308	4313	4318	4323	4328	4333	4338	4343	4348	4353	4358	4363	4368	4373	4378	4383	4388	4393	4398	4403	4408	4413	4418	4423	4428	4433	4438	4443	4448

C-COATED SOLID CARBIDE END MILLS
2 FLUTE SQUARE for RIB PROCESSING

SERIES

PLAIN SHANK **HPI88**

- ▶ Improvement of tool life by applying new coating
- ▶ Application of tight tolerances for precision machining

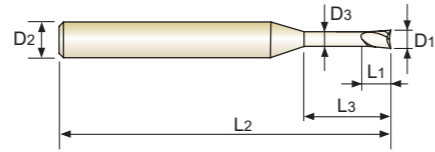

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle (°)	Maximum reach lengths according to draft angle				
								0.5°	1°	1.5°	2°	3°
HPI88814	3.0	6	4.5	16	60	2.85	3.92	16.83	17.41	18.04	18.72	20.24
HPI88815	3.0	6	4.5	20	60	2.85	3.32	20.96	21.69	22.48	23.32	25.21
HPI88816	3.0	6	4.5	25	70	2.85	2.78	26.13	27.04	28.02	29.07	-
HPI88817	3.0	6	4.5	30	70	2.85	2.39	31.30	32.39	33.56	34.82	-
HPI88040	4.0	6	6	12	60	3.85	3.57	12.69	13.14	13.61	14.12	15.27
HPI88818	4.0	6	6	16	60	3.85	2.86	16.83	17.41	18.04	18.72	-
HPI88819	4.0	6	6	20	70	3.85	2.38	20.96	21.69	22.48	23.32	-
HPI88820	4.0	6	6	30	80	3.85	1.68	31.30	32.39	33.56	-	-
HPI88821	4.0	6	6	40	90	3.85	1.30	41.64	43.09	-	-	-
HPI88822	4.0	6	6	50	100	3.85	1.06	51.97	53.78	-	-	-
HPI88050	5.0	6	7.5	20	70	4.85	1.29	20.96	21.69	-	-	-
HPI88823	5.0	6	7.5	30	80	4.85	0.89	31.30	-	-	-	-
HPI88824	5.0	6	7.5	40	90	4.85	0.68	41.64	-	-	-	-
HPI88825	5.0	6	7.5	50	100	4.85	0.55	51.97	-	-	-	-
HPI88060	6.0	6	9	20	70	5.85	0.00	-	-	-	-	-
HPI88826	6.0	6	9	30	80	5.85	0.00	-	-	-	-	-
HPI88827	6.0	6	9	40	90	5.85	0.00	-	-	-	-	-
HPI88828	6.0	6	9	50	100	5.85	0.00	-	-	-	-	-


Unit : mm

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

HPI90 SERIES 2 FLUTE BALL NOSE


RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)																						
						0.2	0.3	0.4	0.5	0.6	0.8	1.0	1.5	2.0	2.5	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0				
P	5	Non-alloy steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	242	319	320	319	324	299	268	288	299	268	288	288				
					fz	0.012	0.015	0.019	0.024	0.029	0.039	0.048	0.054	0.057	0.074	0.091	0.120	0.156	0.174	0.189	0.199	0.212	0.238	0.264				
					RPM	49178	49178	53277	52458	51911	51228	50818	51365	50818	40685	33879	25819	19016	14207	11475	9508	7104	5737	4590				
					FEED	1180	1475	2025	2518	3011	3995	4878	5548	5794	5979	6166	6196	5933	4944	4337	3784	3012	2732	2424				
					8~9	Low alloy steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	242	319	320	319	324	299	268	288	299	268	288	288
									fz	0.012	0.015	0.019	0.024	0.029	0.039	0.048	0.054	0.057	0.074	0.091	0.120	0.156	0.174	0.189	0.199	0.212	0.238	0.264
	RPM	49178	49178	53277					52458	51911	51228	50818	51365	50818	40685	33879	25819	19016	14207	11475	9508	7104	5737	4590				
	FEED	1180	1475	2025					2518	3011	3995	4878	5548	5794	5979	6166	6196	5933	4944	4337	3784	3012	2732	2424				
	11.1	High alloyed steel, and tool steel	0.05D	0.02D					Vc	31	46	67	82	98	129	160	242	319	320	319	324	299	268	288	299	268	288	288
									fz	0.012	0.015	0.019	0.024	0.029	0.039	0.048	0.054	0.057	0.074	0.091	0.120	0.156	0.174	0.189	0.199	0.212	0.238	0.264
					RPM	49178	49178	53277	52458	51911	51228	50818	51365	50818	40685	33879	25819	19016	14207	11475	9508	7104	5737	4590				
					FEED	1180	1475	2025	2518	3011	3995	4878	5548	5794	5979	6166	6196	5933	4944	4337	3784	3012	2732	2424				
11.2					High alloyed steel, and tool steel	0.05D	0.02D	Vc	31	46	67	82	98	129	160	232	309	309	309	309	288	263	278	288	257	278	278	
								fz	0.011	0.014	0.017	0.021	0.025	0.033	0.042	0.047	0.050	0.066	0.083	0.111	0.138	0.153	0.164	0.174	0.187	0.206	0.227	
	RPM	49178	49178	53277				52458	51911	51228	50818	49178	49178	39295	32786	24589	18360	13934	11065	9180	6830	5532	4426					
	FEED	1082	1377	1812				2203	2596	3381	4268	4623	4918	5180	5443	5459	5068	4264	3630	3195	2554	2279	2010					
	H	38.1	Hardened steel	0.05D				0.02D	Vc	31	46	67	82	98	129	160	232	309	309	309	309	288	263	278	288	257	278	278
									fz	0.011	0.014	0.017	0.021	0.025	0.033	0.042	0.047	0.050	0.066	0.083	0.111	0.138	0.153	0.164	0.174	0.187	0.206	0.227
RPM					49178	49178	53277		52458	51911	51228	50818	49178	49178	39295	32786	24589	18360	13934	11065	9180	6830	5532	4426				
FEED					1082	1377	1812		2203	2596	3381	4268	4623	4918	5180	5443	5459	5068	4264	3630	3195	2554	2279	2010				
38.2					Hardened steel	0.05D	0.02D		Vc	29	41	57	72	88	118	144	211	258	257	258	257	242	211	232	242	216	232	232
									fz	0.010	0.013	0.017	0.021	0.024	0.033	0.042	0.047	0.050	0.063	0.075	0.100	0.125	0.141	0.150	0.160	0.170	0.189	0.208
		RPM	45900	43714				45081	45900	46447	47130	45900	44807	40983	32754	27322	20491	15410	11202	9221	7704	5737	4610	3688				
		FEED	918	1136				1533	1928	2230	3111	3855	4212	4098	4098	4098	4098	3852	3159	2767	2466	1951	1743	1535				
		39.1	Hardened steel	0.05D				0.02D	Vc	26	41	52	67	77	103	129	180	227	227	227	216	196	206	211	196	206	206	
									fz	0.010	0.012	0.015	0.019	0.023	0.030	0.038	0.042	0.045	0.056	0.067	0.090	0.113	0.125	0.134	0.144	0.155	0.169	0.188
RPM					40983	43714	40983		42621	40983	40983	38250	36064	28840	24043	18032	13770	10382	8197	6721	5191	4098	3278					
FEED					820	1050	1230		1619	1885	2459	3115	3213	3246	3233	3222	3246	3112	2596	2197	1935	1609	1385	1233				
39.2	Hardened steel				0.05D	0.02D	Vc		21	36	46	57	67	93	113	160	206	206	206	206	185	170	180	185	170	180	180	
							fz		0.010	0.012	0.015	0.019	0.023	0.030	0.037	0.041	0.044	0.055	0.067	0.088	0.111	0.122	0.132	0.142	0.143	0.143		
		RPM	32786	38250			36884	36064	35519	36884	36064	33879	32786	26265	21858	16392	11803	9017	7172	5902	4508	3586	2869					
		FEED	656	918			1106	1371	1634	2213	2669	2778	2885	2907	2885	2620	2200	1893	1676	1280	1026	821						
		39.3	Hardened steel	0.05D			0.02D	Vc	21	31	41	52	62	82	113	144	185	185	185	170	155	170	170	154	165	165		
								fz	0.009	0.011	0.014	0.017	0.022	0.029	0.033	0.039	0.040	0.051	0.061	0.079	0.100	0.109	0.119	0.130	0.131	0.133	0.129	
RPM	32786				32786	32786		32786	32786	32786	36064	30600	29507	23587	19672	14754	10819	8197	6762	5410	4098	3278	2622					
FEED	590				721	918		1114	1443	1901	2380	2387	2361	2380	2400	2331	2164	1787	1609	1407	1073	872	677					
40	Chilled Cast Iron				0.05D	0.02D		Vc	31	46	67	82	98	129	160	232	309	309	309	309	288	263	278	288	257	278	278	
								fz	0.011	0.014	0.017	0.021	0.025	0.033	0.042	0.047	0.050	0.066	0.083	0.111	0.138	0.153	0.164	0.174	0.187	0.206	0.227	
		RPM	49178	49178			53277	52458	51911	51228	50818	49178	49178	39295	32786	24589	18360	13934	11065	9180	6830	5532	4426					
		FEED	1082	1377			1812	2203	2596	3381	4268	4623	4918	5180	5443	5459	5068	4264	3630	3195	2554	2279	2010					
		41	Hardened Cast Iron	0.05D			0.02D	Vc	29	41	57	72	88	118	144	211	258	257	258	257	242	211	232	242	216	232	232	
								fz	0.010	0.013	0.017	0.021	0.024	0.033	0.042	0.047	0.050	0.063	0.075	0.100	0.125	0.141	0.150	0.160	0.170	0.189	0.208	
RPM	45900				43714	45081		45900	46447	47130	45900	44807	40983	32754	27322	20491	15410	11202	9221	7704	5737	4610	3688					
FEED	918				1136	1533		1928	2230	3111	3855	4212	4098	4098	4098	4098	3852	3159	2767	2466	1951	1743	1535					



◎ : Excellent ○ : Good

ISO	P										M					K																			
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron					Nodular cast iron					Malleable cast iron				
VDI 3323																																			




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)																	
				0.2		0.2		0.2		0.2		0.2		0.2		0.3		0.3		0.3	
				L.B.S	0.3	0.5	0.75	1	1.25	1.5	1.75	2	2.5	3	5	0.5	0.6	0.75	1	1.25	1.5
P	5	Non-alloy steel	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	46	42
			fz	0.012	0.012	0.012	0.012	0.011	0.011	0.011	0.011	0.010	0.010	0.007	0.015	0.015	0.015	0.015	0.015	0.015	0.014
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1180	1180	1180	1180	974	974	974	974	787	787	207	1475	1475	1475	1475	1475	1475	1239
	8-9	Low alloy steel	Vc	31	31	31	31	28	28	28	25	25	9	46	46	46	46	46	46	42	
			fz	0.012	0.012	0.012	0.012	0.011	0.011	0.011	0.011	0.010	0.010	0.007	0.015	0.015	0.015	0.015	0.015	0.014	
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1180	1180	1180	1180	974	974	974	974	787	787	207	1475	1475	1475	1475	1475	1475	1239
	11.1	High alloyed steel, and tool steel	Vc	31	31	31	31	28	28	28	25	25	9	46	46	46	46	46	46	42	
			fz	0.012	0.012	0.012	0.012	0.011	0.011	0.011	0.011	0.010	0.010	0.007	0.015	0.015	0.015	0.015	0.015	0.014	
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1180	1180	1180	1180	974	974	974	974	787	787	207	1475	1475	1475	1475	1475	1475	1239
	11.2	High alloyed steel, and tool steel	Vc	31	31	31	31	28	28	28	25	25	9	46	46	46	46	46	46	42	
			fz	0.011	0.011	0.011	0.011	0.010	0.010	0.010	0.010	0.009	0.009	0.007	0.014	0.014	0.014	0.014	0.014	0.013	
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1082	1082	1082	1082	885	885	885	885	708	708	207	1377	1377	1377	1377	1377	1377	1151
H	38.1	Hardened steel	Vc	31	31	31	31	28	28	28	28	25	25	9	46	46	46	46	46	42	
			fz	0.011	0.011	0.011	0.011	0.010	0.010	0.010	0.010	0.009	0.009	0.007	0.014	0.014	0.014	0.014	0.014	0.013	
			RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260
			FEED	1082	1082	1082	1082	885	885	885	885	708	708	207	1377	1377	1377	1377	1377	1377	1151
	38.2	Hardened steel	Vc	29	29	29	29	26	26	26	26	23	23	9	41	41	41	41	41	37	
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.013	0.013	0.013	0.013	0.013	0.012	
			RPM	45900	45900	45900	45900	41310	41310	41310	41310	36720	36720	13770	43714	43714	43714	43714	43714	43714	39343
			FEED	918	918	918	918	744	744	744	744	588	588	165	1137	1137	1137	1137	1137	1137	944
	39.1	Hardened steel	Vc	26	26	26	26	23	23	23	21	21	8	41	41	41	41	41	41	37	
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.012	0.012	0.012	0.012	0.012	0.011	
			RPM	40983	40983	40983	40983	36885	36885	36885	36885	32786	32786	12295	43714	43714	43714	43714	43714	43714	39343
			FEED	820	820	820	820	664	664	664	664	525	525	148	1049	1049	1049	1049	1049	1049	866
	39.2	Hardened steel	Vc	21	21	21	21	19	19	19	16	16	6	36	36	36	36	36	36	32	
			fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.012	0.012	0.012	0.012	0.012	0.011	
			RPM	32786	32786	32786	32786	29507	29507	29507	29507	26229	26229	9836	38250	38250	38250	38250	38250	38250	34425
			FEED	656	656	656	656	531	531	531	531	420	420	118	918	918	918	918	918	918	757
39.3	Hardened steel	Vc	21	21	21	21	19	19	19	16	16	6	31	31	31	31	31	31	28		
		fz	0.009	0.009	0.009	0.009	0.008	0.008	0.008	0.008	0.007	0.007	0.005	0.011	0.011	0.011	0.011	0.011	0.010		
		RPM	32786	32786	32786	32786	29507	29507	29507	29507	26229	26229	9836	32786	32786	32786	32786	32786	32786	29507	
		FEED	590	590	590	590	472	472	472	472	367	367	98	721	721	721	721	721	721	590	
40	Chilled Cast Iron	Vc	31	31	31	31	28	28	28	25	25	9	46	46	46	46	46	46	42		
		fz	0.011	0.011	0.011	0.011	0.010	0.010	0.010	0.010	0.009	0.009	0.007	0.014	0.014	0.014	0.014	0.014	0.013		
		RPM	49178	49178	49178	49178	44260	44260	44260	44260	39342	39342	14753	49178	49178	49178	49178	49178	49178	44260	
		FEED	1082	1082	1082	1082	885	885	885	885	708	708	207	1377	1377	1377	1377	1377	1377	1151	
41	Hardened Cast Iron	Vc	29	29	29	29	26	26	26	26	23	23	9	41	41	41	41	41	37		
		fz	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.008	0.008	0.006	0.013	0.013	0.013	0.013	0.013	0.012		
		RPM	45900	45900	45900	45900	41310	41310	41310	41310	36720	36720	13770	43714	43714	43714	43714	43714	43714	39343	
		FEED	918	918	918	918	744	744	744	744	588	588	165	1137	1137	1137	1137	1137	1137	944	

NEXT PAGE ▶

HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

VDI 3323	Parameter	Diameter (Ø)																							
		0.3		0.3		0.3		0.3		0.3		0.3		0.4		0.4		0.4		0.4					
		L.B.S	2	2.25	2.5	3	3.5	4	5	7	0.5	0.8	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	1	
5	Vc	42	42	42	42	37	37	28	14	67	67	67	67	67	60	60	60	60	54	54	54	40	82		
		fz	0.014	0.014	0.014	0.014	0.012	0.012	0.011	0.009	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.024	
		RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458	
		FEED	1239	1239	1239	1239	944	944	649	266	2025	2025	2025	2025	2025	1630	1630	1630	1630	1279	1279	1279	831	2518	
	8-9	Low alloy steel	Vc	42	42	42	42	37	37	28	14	67	67	67	67	60	60	60	60	54	54	54	40	82	
			fz	0.014	0.014	0.014	0.014	0.012	0.012	0.011	0.009	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.024
			RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
			FEED	1239	1239	1239	1239	944	944	649	266	2025	2025	2025	2025	2025	1630	1630	1630	1630	1279	1279	1279	831	2518
	11.1	High alloyed steel, and tool steel	Vc	42	42	42	42	37	37	28	14	67	67	67	67	60	60	60	60	54	54	54	40	82	
			fz	0.014	0.014	0.014	0.014	0.012	0.012	0.011	0.009	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.024
			RPM	44260	44260	44260	44260	39342	39342	29507	14753	53277	53277	53277	53277	53277	47949	47949	47949	47949	42622	42622	42622	31966	52458
			FEED	1239	1239	1239	1239	944	944	649	266	2025	2025	2025	2025	2025	1630	1630	1630	1630	1279	1279	1279	831	2518
	11.2	High alloyed steel, and tool steel	Vc	42	42	42	42	37	37	28	14	67	67	67	67	60	60	60	60	54	54	54	40	82	
			fz	0.013	0.013	0.013	0.013	0.011	0.011	0.010	0.008	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.014	0.014	0.014	0.012	0.021
			RPM	44260</																					

HPI91, HPI92 SERIES

2 FLUTE BALL NOSE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																				
			0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5		
P	5	Vc	82	82	82	82	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88	
		fz	0.024	0.024	0.024	0.024	0.022	0.022	0.022	0.022	0.022	0.019	0.019	0.017	0.017	0.029	0.029	0.029	0.029	0.029	0.026	0.026	0.026
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
	8-9	Vc	82	82	82	82	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88	88
		fz	0.024	0.024	0.024	0.024	0.022	0.022	0.022	0.022	0.022	0.019	0.019	0.017	0.017	0.029	0.029	0.029	0.029	0.029	0.026	0.026	0.026
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
	11.1	Vc	82	82	82	82	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88	88
		fz	0.024	0.024	0.024	0.024	0.022	0.022	0.022	0.022	0.022	0.019	0.019	0.017	0.017	0.029	0.029	0.029	0.029	0.029	0.026	0.026	0.026
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
	11.2	Vc	82	82	82	82	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88	88
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.025	0.025	0.025	0.025	0.025	0.023	0.023	0.023
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
H	38.1	Vc	82	82	82	82	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88	
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.025	0.025	0.025	0.025	0.025	0.023	0.023	0.023
		RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720
	38.2	Vc	72	72	72	72	65	65	65	65	65	58	58	43	43	88	88	88	88	88	79	79	79
		fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.024	0.024	0.024	0.024	0.024	0.022	0.022	0.022
		RPM	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	46447	46447	46447	46447	46447	41802	41802	41802
	39.1	Vc	67	67	67	67	60	60	60	60	60	54	54	40	40	77	77	77	77	77	70	70	70
		fz	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.013	0.013	0.023	0.023	0.023	0.023	0.023	0.021	0.021	0.021
		RPM	42621	42621	42621	42621	38359	38359	38359	38359	38359	34097	34097	25573	25573	40983	40983	40983	40983	40983	36885	36885	36885
	39.2	Vc	57	57	57	57	51	51	51	51	51	45	45	34	34	67	67	67	67	67	60	60	60
		fz	0.019	0.019	0.019	0.019	0.017	0.017	0.017	0.017	0.017	0.015	0.015	0.013	0.013	0.023	0.023	0.023	0.023	0.023	0.021	0.021	0.021
		RPM	36064	36064	36064	36064	32458	32458	32458	32458	32458	28851	21638	21638	35519	35519	35519	35519	35519	35519	31967	31967	31967
39.3	Vc	52	52	52	52	46	46	46	46	46	41	41	31	31	62	62	62	62	62	56	56	56	
	fz	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.015	0.015	0.014	0.014	0.012	0.012	0.022	0.022	0.022	0.022	0.022	0.020	0.020	0.020	
	RPM	32786	32786	32786	32786	29507	29507	29507	29507	29507	26229	26229	19672	19672	32786	32786	32786	32786	32786	29507	29507	29507	
40	Vc	82	82	82	82	74	74	74	74	66	66	49	49	98	98	98	98	98	88	88	88	88	
	fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.025	0.025	0.025	0.025	0.025	0.023	0.023	0.023	
	RPM	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	51911	51911	51911	51911	51911	46720	46720	46720	
41	Vc	72	72	72	72	65	65	65	65	65	58	58	43	43	88	88	88	88	88	79	79	79	
	fz	0.021	0.021	0.021	0.021	0.019	0.019	0.019	0.019	0.019	0.017	0.017	0.015	0.015	0.024	0.024	0.024	0.024	0.024	0.022	0.022	0.022	
	RPM	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	46447	46447	46447	46447	46447	41802	41802	41802	

NEXT PAGE ▶

HPI91, HPI92 SERIES

2 FLUTE BALL NOSE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

VDI 3323	Parameter L.B.S	Diameter (Ø)																				
		0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9	
5	Vc	88	88	88	88	78	78	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116
	fz	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.029	0.026	0.026	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982
8-9	Vc	88	88	88	88	78	78	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116
	fz	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.029	0.026	0.026	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982
11.1	Vc	88	88	88	88	78	78	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116
	fz	0.026	0.026	0.026	0.023	0.023	0.023	0.020	0.020	0.029	0.026	0.026	0.023	0.039	0.039	0.039	0.035	0.035	0.035	0.035	0.031	0.031
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982
11.2	Vc	88	88	88	88	78	78	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116
	fz	0.023	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.025	0.023	0.023	0.020	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982
38.1	Vc	88	88	88	88	78	78	78	78	78	59	59	114	103	103	91	129	129	129	116	116	116
	fz	0.023	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.025	0.023	0.023	0.020	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026
	RPM	46720	46720	46720	41529	41529	41529	31147	31147	51911	46720	46720	41529	51228	51228	51228	46105	46105	46105	46105	40982	40982
38.2	Vc	79	79	79	79	70	70	70	70	70	53	53	102	92	92	82	118	118	118	107	107	107
	fz	0.022	0.022	0.022	0.019	0.019	0.019	0.017	0.017	0.024	0.022	0.022	0.019	0.033	0.033	0.033	0.030	0.030	0.030	0.030	0.026	0.026
	RPM	41802	41802	41802	37158	37158	37158	27868	27868	46447	41802	41802	37158	47130	47130	47130	42417	42417	42417	42417	37704	37704
39.1	Vc	70	70	70	70	62	62	62	62	62	46	46	90	81	81	72	103	103	103	93	93	93
	fz	0.021	0.021	0.021	0.018	0.018	0.018	0.016	0.016	0.023	0.021	0.021	0.018	0.030	0.030	0.030	0.027	0.027	0.027	0.024	0.024	0.024
	RPM	36885	36885	36885	32786	32786	32786	24590	24590	40983	36885											

HPI91, HPI92 SERIES

2 FLUTE BALL NOSE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																			
			1.5	1.5	1.5	1.5	1.5	1.6	1.6	1.6	1.6	2	2	2	2	2	2	2	2	2	2	
			18	20	22	25	30	8	12	16	20	2	4	6	8	10	12	13	14	16	18	20
P	5	Vc	194	194	194	145	145	258	232	232	206	319	319	319	319	319	287	287	287	287	287	255
		fz	0.043	0.043	0.043	0.038	0.038	0.055	0.050	0.050	0.044	0.057	0.057	0.057	0.057	0.057	0.051	0.051	0.051	0.051	0.051	0.046
		RPM	41092	41092	41092	30819	30819	51228	46105	46105	40982	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654
		FEED	3534	3534	3534	2342	2342	5635	4611	4611	3606	5793	5793	5793	5793	5793	4665	4665	4665	4665	4665	3740
	8-9	Vc	194	194	194	145	145	258	232	232	206	319	319	319	319	319	287	287	287	287	287	255
		fz	0.043	0.043	0.043	0.038	0.038	0.055	0.050	0.050	0.044	0.057	0.057	0.057	0.057	0.057	0.051	0.051	0.051	0.051	0.051	0.046
		RPM	41092	41092	41092	30819	30819	51228	46105	46105	40982	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654
		FEED	3534	3534	3534	2342	2342	5635	4611	4611	3606	5793	5793	5793	5793	5793	4665	4665	4665	4665	4665	3740
	11.1	Vc	194	194	194	145	145	258	232	232	206	319	319	319	319	319	287	287	287	287	287	255
		fz	0.043	0.043	0.043	0.038	0.038	0.055	0.050	0.050	0.044	0.057	0.057	0.057	0.057	0.057	0.051	0.051	0.051	0.051	0.051	0.046
		RPM	41092	41092	41092	30819	30819	51228	46105	46105	40982	50818	50818	50818	50818	50818	45736	45736	45736	45736	45736	40654
		FEED	3534	3534	3534	2342	2342	5635	4611	4611	3606	5793	5793	5793	5793	5793	4665	4665	4665	4665	4665	3740
11.2	Vc	185	185	185	139	139	247	222	222	198	309	309	309	309	309	278	278	278	278	278	247	
	fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.040	
	RPM	39342	39342	39342	29507	29507	49178	44260	44260	39342	49178	49178	49178	49178	49178	44260	44260	44260	44260	44260	39342	
	FEED	2990	2990	2990	1947	1947	4721	3806	3806	2990	4918	4918	4918	4918	4918	3983	3983	3983	3983	3983	3147	
H	38.1	Vc	185	185	185	139	139	247	222	222	198	309	309	309	309	309	278	278	278	278	278	247
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	39342	39342	39342	29507	29507	49178	44260	44260	39342	49178	49178	49178	49178	49178	44260	44260	44260	44260	44260	39342
		FEED	2990	2990	2990	1947	1947	4721	3806	3806	2990	4918	4918	4918	4918	4918	3983	3983	3983	3983	3983	3147
	38.2	Vc	169	169	169	127	127	225	202	202	180	258	258	258	258	258	232	232	232	232	232	206
		fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.040
		RPM	35846	35846	35846	26884	26884	44671	40204	40204	35737	40983	40983	40983	40983	40983	36885	36885	36885	36885	36885	32786
		FEED	2724	2724	2724	1774	1774	4288	3458	3458	2716	4098	4098	4098	4098	4098	3320	3320	3320	3320	3320	2623
	39.1	Vc	144	144	144	108	108	192	172	172	153	227	227	227	227	227	204	204	204	204	204	181
		fz	0.034	0.034	0.034	0.029	0.029	0.043	0.039	0.039	0.034	0.045	0.045	0.045	0.045	0.045	0.041	0.041	0.041	0.041	0.041	0.036
		RPM	30600	30600	30600	22950	22950	38114	34303	34303	30491	36064	36064	36064	36064	36064	32458	32458	32458	32458	32458	28851
		FEED	2081	2081	2081	1331	1331	3278	2676	2676	2073	3246	3246	3246	3246	3246	2662	2662	2662	2662	2662	2077
39.2	Vc	128	128	128	96	96	170	153	153	136	206	206	206	206	206	185	185	185	185	185	165	
	fz	0.033	0.033	0.033	0.029	0.029	0.043	0.039	0.039	0.034	0.044	0.044	0.044	0.044	0.044	0.040	0.040	0.040	0.040	0.040	0.035	
	RPM	27103	27103	27103	20327	20327	33811	30430	30430	27049	32786	32786	32786	32786	32786	29507	29507	29507	29507	29507	26229	
	FEED	1789	1789	1789	1179	1179	2908	2374	2374	1839	2885	2885	2885	2885	2885	2361	2361	2361	2361	2361	1836	
39.3	Vc	115	115	115	87	87	153	138	138	123	185	185	185	185	185	167	167	167	167	167	148	
	fz	0.031	0.031	0.031	0.027	0.027	0.039	0.035	0.035	0.031	0.040	0.040	0.040	0.040	0.040	0.036	0.036	0.036	0.036	0.036	0.032	
	RPM	24480	24480	24480	18360	18360	30532	27479	27479	24426	29507	29507	29507	29507	29507	26556	26556	26556	26556	26556	23606	
	FEED	1518	1518	1518	991	991	2381	1924	1924	1514	2361	2361	2361	2361	2361	1912	1912	1912	1912	1912	1511	
40	Vc	185	185	185	139	139	247	222	222	198	309	309	309	309	309	278	278	278	278	278	247	
	fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.040	
	RPM	39342	39342	39342	29507	29507	49178	44260	44260	39342	49178	49178	49178	49178	49178	44260	44260	44260	44260	44260	39342	
	FEED	2990	2990	2990	1947	1947	4721	3806	3806	2990	4918	4918	4918	4918	4918	3983	3983	3983	3983	3983	3147	
41	Vc	169	169	169	127	127	225	202	202	180	258	258	258	258	258	232	232	232	232	232	206	
	fz	0.038	0.038	0.038	0.033	0.033	0.048	0.043	0.043	0.038	0.050	0.050	0.050	0.050	0.050	0.045	0.045	0.045	0.045	0.045	0.040	
	RPM	35846	35846	35846	26884	26884	44671	40204	40204	35737	40983	40983	40983	40983	40983	36885	36885	36885	36885	36885	32786	
	FEED	2724	2724	2724	1774	1774	4288	3458	3458	2716	4098	4098	4098	4098	4098	3320	3320	3320	3320	3320	2623	

NEXT PAGE ▶

HPI91, HPI92 SERIES

2 FLUTE BALL NOSE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																					
			2	2	2	2	2	2.5	2.5	2.5	2.5	2.5	2.5	3	3	3	3	3	3	3				
			25	30	35	40	50	6	8	10	15	20	25	30	35	6	8	10	12	14	15	16	20	25
P	5	Vc	255	255	192	192	96	320	320	320	288	288	288	256	256	319	319	319	319	319	319	287	287	287
		fz	0.046	0.046	0.040	0.040	0.034	0.074	0.074	0.074	0.066	0.066	0.066	0.059	0.059	0.091	0.091	0.091	0.091	0.091	0.091	0.082	0.082	0.082
		RPM	40654	40654	30491	30491	15245	40685	40685	40685	36617	36617	36617	32548	32548	33879	33879	33879	33879	33879	33879	30491	30491	30491
		FEED	3740	3740	2439	2439	1037	6021	6021	6021	4833	4833	4833	3841	3841	6166	6166	6166	6166	6166	6166	5001	5001	5001
	8-9	Vc	255	255	192	192	96	320	320	320	288	288	288	256	256	319	319	319	319	319	319	287	287	287
		fz	0.046	0.046	0.040	0.040	0.034	0.074	0.074	0.074	0.066	0.066	0.066	0.059	0.059	0.091	0.091	0.091	0.091	0.091	0.091	0.082	0.082	0.082
		RPM	40654	40654	30491	30491	15245	40685	40685	40685	36617	36617	36617	32548	32548	33879	33879	33879	33879	33879	33879	30491	30491	30491
		FEED	3740	3740	2439	2439	1037	6021	6021	6021	4833	4833	4833	3841	3841	6166	6166	6166	6166	6166	6166	5001	5001	5001
	11.1	Vc	255	255	192	192	96	320	320	320	288	288	288	256	256	319	319	319	319	319				

HPI91, HPI92 SERIES


2 FLUTE BALL NOSE for RIB PROCESSING



RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																																
			3 30	3 35	3 40	3 50	3.5 15	3.5 20	3.5 25	3.5 30	3.5 35	3.5 40	3.5 45	4 8	4 10	4 12	4 14	4 15	4 20	4 25	4 30	4 35	4 40	4 45	4 50	4 55	4 60	4 65	4 70	4 75	4 80				
P	5	Vc	287	255	255	192	324	292	292	292	292	260	260	324	324	324	324	324	324	292	292	292	292	260	260	324	324	324	324	324	292	292	292	292	
		fz	0.082	0.073	0.073	0.064	0.105	0.094	0.094	0.094	0.094	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	
		RPM	30491	27103	27103	20327	29510	26559	26559	26559	26559	23608	23608	25819	25819	25819	25819	25819	25819	25819	23237	23237	23237	23237	23608	23608	25819	25819	25819	25819	25819	23237	23237	23237	23237
		FEED	5001	3957	3957	2602	6197	4993	4993	4993	4993	3966	3966	6197	6197	6197	6197	6197	6197	6197	5019	5019	5019	5019	3966	3966	6197	6197	6197	6197	6197	5019	5019	5019	5019
	Ap	0.042	0.042	0.039	0.030	0.063	0.056	0.056	0.049	0.049	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.072	0.072	0.064	0.064	0.056	0.056	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.064	0.064	0.056	0.056	
	8-9	Vc	287	255	255	192	324	292	292	292	292	260	260	324	324	324	324	324	324	292	292	292	292	260	260	324	324	324	324	324	292	292	292	292	
		fz	0.082	0.073	0.073	0.064	0.105	0.094	0.094	0.094	0.094	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	
		RPM	30491	27103	27103	20327	29510	26559	26559	26559	26559	23608	23608	25819	25819	25819	25819	25819	25819	25819	23237	23237	23237	23237	23608	23608	25819	25819	25819	25819	25819	23237	23237	23237	23237
		FEED	5001	3957	3957	2602	6197	4993	4993	4993	4993	3966	3966	6197	6197	6197	6197	6197	6197	6197	5019	5019	5019	5019	3966	3966	6197	6197	6197	6197	6197	5019	5019	5019	5019
	Ap	0.042	0.042	0.039	0.030	0.063	0.056	0.056	0.049	0.049	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.072	0.072	0.064	0.064	0.056	0.056	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.064	0.064	0.056	0.056	
	11.1	Vc	287	255	255	192	324	292	292	292	292	260	260	324	324	324	324	324	324	292	292	292	292	260	260	324	324	324	324	324	292	292	292	292	
		fz	0.082	0.073	0.073	0.064	0.105	0.094	0.094	0.094	0.094	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	0.084	0.084	0.120	0.120	0.120	0.120	0.120	0.108	0.108	0.108	0.108	
RPM		30491	27103	27103	20327	29510	26559	26559	26559	26559	23608	23608	25819	25819	25819	25819	25819	25819	25819	23237	23237	23237	23237	23608	23608	25819	25819	25819	25819	25819	23237	23237	23237	23237	
FEED		5001	3957	3957	2602	6197	4993	4993	4993	4993	3966	3966	6197	6197	6197	6197	6197	6197	6197	5019	5019	5019	5019	3966	3966	6197	6197	6197	6197	6197	5019	5019	5019	5019	
Ap	0.042	0.042	0.039	0.030	0.063	0.056	0.056	0.049	0.049	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.072	0.072	0.064	0.064	0.056	0.056	0.049	0.049	0.080	0.080	0.080	0.072	0.072	0.064	0.064	0.056	0.056		
11.2	Vc	278	247	247	185	309	278	278	278	278	247	247	309	309	309	309	309	309	278	278	278	278	247	247	309	309	309	309	309	278	278	278	278		
	fz	0.075	0.066	0.066	0.058	0.097	0.087	0.087	0.087	0.087	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100		
	RPM	29507	26229	26229	19672	28068	25261	25261	25261	25261	22454	22454	24589	24589	24589	24589	24589	24589	22130	22130	22130	22130	22454	22454	24589	24589	24589	24589	24589	22130	22130	22130	22130		
	FEED	4426	3462	3462	2282	5445	4395	4395	4395	4395	3503	3503	5459	5459	5459	5459	5459	5459	4426	4426	4426	4426	3503	3503	5459	5459	5459	5459	5459	4426	4426	4426	4426		
Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.061	0.054	0.054	0.048	0.048	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.054	0.054	0.048	0.048		
H	38.1	Vc	278	247	247	185	309	278	278	278	247	247	309	309	309	309	309	309	278	278	278	278	247	247	309	309	309	309	309	278	278	278	278		
		fz	0.075	0.066	0.066	0.058	0.097	0.087	0.087	0.087	0.087	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100	0.078	0.078	0.111	0.111	0.111	0.111	0.111	0.100	0.100	0.100	0.100	
		RPM	29507	26229	26229	19672	28068	25261	25261	25261	25261	22454	22454	24589	24589	24589	24589	24589	24589	22130	22130	22130	22130	22454	22454	24589	24589	24589	24589	24589	22130	22130	22130	22130	
		FEED	4426	3462	3462	2282	5445	4395	4395	4395	4395	3503	3503	5459	5459	5459	5459	5459	5459	4426	4426	4426	4426	3503	3503	5459	5459	5459	5459	5459	4426	4426	4426	4426	
	Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.061	0.054	0.054	0.048	0.048	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.054	0.054	0.048	0.048	
	38.2	Vc	232	206	206	155	258	232	232	232	232	206	206	257	257	257	257	257	257	232	232	232	232	206	206	257	257	257	257	257	232	232	232	232	
		fz	0.068	0.060	0.060	0.053	0.087	0.079	0.079	0.079	0.079	0.070	0.070	0.100	0.100	0.100	0.100	0.100	0.100	0.090	0.090	0.090	0.090	0.070	0.070	0.100	0.100	0.100	0.100	0.100	0.090	0.090	0.090	0.090	
		RPM	24590	21858	21858	16393	23433	21090	21090	21090	21090	18746	18746	20491	20491	20491	20491	20491	20491	18442	18442	18442	18442	18746	18746	20491	20491	20491	20491	20491	18442	18442	18442	18442	
		FEED	3344	2623	2623	1738	4077	3332	3332	3332	3332	2624	2624	4098	4098	4098	4098	4098	4098	3320	3320	3320	3320	2624	2624	4098	4098	4098	4098	4098	3320	3320	3320	3320	
	Ap	0.036	0.036	0.033	0.026	0.054	0.048	0.048	0.042	0.042	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.061	0.061	0.054	0.054	0.048	0.048	0.042	0.042	0.068	0.068	0.068	0.061	0.061	0.054	0.054	0.048	0.048	
	39.1	Vc	204	181	181	136	227	204	204	204	204	181	181	227	227	227	227	227	227	204	204	204	204	181	181	227	227	227	227	227	204	204	204	204	
		fz	0.060	0.054	0.054	0.047	0.079	0.071	0.071	0.071	0.071	0.063	0.063	0.090	0.090	0.090	0.090	0.090	0.090	0.081	0.081	0.081	0.081	0.063	0.063	0.090	0.090	0.090	0.090	0.090	0.081	0.081	0.081	0.081	
RPM		21639	19234	19234	14426	20600	18540	18540	18540	18540	16480	16480	18032	18032	18032	18032	18032	18032	16229	16229	16229	16229	16480	16480	18032	18032	18032	18032	18032	16229	16229	16229	16229		
FEED		2597	2077	2077	1356	3255	2633	2633	2633	2633	2076	2076	3246	3246	3246	3246	3246	3246	2629	2629	2629	2629	2076	2076	3246	3246	3246	3246	3246	2629	2629	2629	2629		
Ap	0.034	0.034	0.031	0.024	0.050	0.045	0.045	0.039	0.039	0.039	0.039	0.064	0.064	0.064	0.058	0.058	0.058	0.051	0.051	0.051	0.051	0.039	0.039	0.064	0.064	0.064	0.058	0.058	0.051	0.051	0.045	0.045			
39.2	Vc	185	165	165	124	206	186	186	186	186	165	165	206	206	206	206	206	206	185	185	185	185	165	165	206	206	206	206	206	185	185	185	185		
	fz	0.060	0.054	0.054	0.047</																														


HPI91, HPI92 SERIES 2 FLUTE BALL NOSE for RIB PROCESSING



RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																			
			8 35	8 50	8 55	8 60	8 70	8 80	8 98	8 120	10 35	10 55	10 60	10 65	10 75	10 86	10 120	12 60	12 80	12 106	12 120	
P	5	Vc	288	260	260	260	260	260	231	231	299	269	269	269	269	269	239	268	241	241	241	
		fz	0.189	0.170	0.170	0.170	0.170	0.170	0.151	0.151	0.199	0.179	0.179	0.179	0.179	0.179	0.159	0.212	0.191	0.191	0.191	
		RPM	11475	10328	10328	10328	10328	10328	9180	9180	9508	8557	8557	8557	8557	8557	7606	7104	6394	6394	6394	
		FEED	4338	3512	3512	3512	3512	3512	2772	2772	3784	3063	3063	3063	3063	3063	2419	3012	2443	2443	2443	
	Ap	0.144	0.128	0.128	0.128	0.112	0.112	0.104	0.180	0.160	0.160	0.160	0.160	0.160	0.140	0.140	0.216	0.192	0.168	0.168		
	8-9	Vc	288	260	260	260	260	231	231	299	269	269	269	269	269	269	239	268	241	241	241	
		fz	0.189	0.170	0.170	0.170	0.170	0.151	0.151	0.199	0.179	0.179	0.179	0.179	0.179	0.159	0.212	0.191	0.191	0.191		
		RPM	11475	10328	10328	10328	10328	9180	9180	9508	8557	8557	8557	8557	8557	8557	7606	7104	6394	6394	6394	
		FEED	4338	3512	3512	3512	3512	2772	2772	3784	3063	3063	3063	3063	3063	3063	2419	3012	2443	2443	2443	
	Ap	0.144	0.128	0.128	0.128	0.112	0.112	0.104	0.180	0.160	0.160	0.160	0.160	0.160	0.140	0.140	0.216	0.192	0.168	0.168		
	11.1	Vc	288	260	260	260	260	231	231	299	269	269	269	269	269	269	239	268	241	241	241	
		fz	0.189	0.170	0.170	0.170	0.170	0.151	0.151	0.199	0.179	0.179	0.179	0.179	0.179	0.159	0.212	0.191	0.191	0.191		
RPM		11475	10328	10328	10328	10328	9180	9180	9508	8557	8557	8557	8557	8557	8557	7606	7104	6394	6394	6394		
FEED		4338	3512	3512	3512	3512	2772	2772	3784	3063	3063	3063	3063	3063	3063	2419	3012	2443	2443	2443		
Ap	0.144	0.128	0.128	0.128	0.112	0.112	0.104	0.180	0.160	0.160	0.160	0.160	0.160	0.140	0.140	0.216	0.192	0.168	0.168			
11.2	Vc	278	250	250	250	250	222	222	288	260	260	260	260	260	231	257	232	232	232			
	fz	0.164	0.148	0.148	0.148	0.148	0.131	0.131	0.174	0.157	0.157	0.157	0.157	0.157	0.139	0.187	0.168	0.168	0.168			
	RPM	11065	9959	9959	9959	9959	8852	8852	9180	8262	8262	8262	8262	8262	7344	6830	6147	6147	6147			
	FEED	3629	2948	2948	2948	2948	2319	2319	3195	2594	2594	2594	2594	2594	2042	2554	2065	2065	2065			
Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143			
H	38.1	Vc	278	250	250	250	250	222	222	288	260	260	260	260	260	231	257	232	232	232		
		fz	0.164	0.148	0.148	0.148	0.148	0.131	0.131	0.174	0.157	0.157	0.157	0.157	0.157	0.139	0.187	0.168	0.168	0.168		
		RPM	11065	9959	9959	9959	9959	8852	8852	9180	8262	8262	8262	8262	8262	7344	6830	6147	6147	6147		
		FEED	3629	2948	2948	2948	2948	2319	2319	3195	2594	2594	2594	2594	2594	2042	2554	2065	2065	2065		
	Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143		
	38.2	Vc	232	209	209	209	209	185	185	242	218	218	218	218	218	194	216	195	195	195		
		fz	0.150	0.135	0.135	0.135	0.135	0.120	0.120	0.160	0.144	0.144	0.144	0.144	0.144	0.128	0.170	0.153	0.153	0.153		
		RPM	9221	8299	8299	8299	8299	7377	7377	7704	6934	6934	6934	6934	6934	6163	5737	5163	5163	5163		
		FEED	2766	2241	2241	2241	2241	1770	1770	2465	1997	1997	1997	1997	1997	1578	1951	1580	1580	1580		
	Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143		
	39.1	Vc	206	185	185	185	185	165	165	211	190	190	190	190	190	169	196	176	176	176		
		fz	0.134	0.121	0.121	0.121	0.121	0.107	0.107	0.144	0.130	0.130	0.130	0.130	0.130	0.115	0.155	0.140	0.140	0.140		
RPM		8197	7377	7377	7377	7377	6558	6558	6721	6049	6049	6049	6049	6049	5377	5191	4672	4672	4672			
FEED		2197	1785	1785	1785	1785	1403	1403	1936	1573	1573	1573	1573	1573	1237	1609	1308	1308	1308			
Ap	0.115	0.102	0.102	0.102	0.090	0.090	0.083	0.144	0.128	0.128	0.128	0.128	0.128	0.112	0.112	0.173	0.154	0.134	0.134			
39.2	Vc	180	162	162	162	162	144	144	185	167	167	167	167	167	148	170	153	153	153			
	fz	0.132	0.119	0.119	0.119	0.119	0.106	0.106	0.142	0.128	0.128	0.128	0.128	0.128	0.114	0.142	0.128	0.128	0.128			
	RPM	7172	6455	6455	6455	6455	5738	5738	5902	5312	5312	5312	5312	5312	4722	4508	4057	4057	4057			
	FEED	1893	1536	1536	1536	1536	1216	1216	1676	1360	1360	1360	1360	1360	1077	1280	1039	1039	1039			
Ap	0.115	0.102	0.102	0.102	0.090	0.090	0.083	0.144	0.128	0.128	0.128	0.128	0.128	0.112	0.112	0.173	0.154	0.134	0.134			
39.3	Vc	170	153	153	153	153	136	136	170	153	153	153	153	153	136	154	139	139	139			
	fz	0.119	0.107	0.107	0.107	0.107	0.095	0.095	0.130	0.117	0.117	0.117	0.117	0.117	0.104	0.131	0.118	0.118	0.118			
	RPM	6762	6086	6086	6086	6086	5410	5410	5410	4869	4869	4869	4869	4869	4328	4098	3688	3688	3688			
	FEED	1609	1302	1302	1302	1302	1028	1028	1407	1139	1139	1139	1139	1139	900	1074	870	870	870			
Ap	0.094	0.083	0.083	0.083	0.073	0.073	0.068	0.117	0.104	0.104	0.104	0.104	0.104	0.091	0.140	0.125	0.109	0.109				
40	Vc	278	250	250	250	250	222	222	288	260	260	260	260	260	231	257	232	232	232			
	fz	0.164	0.148	0.148	0.148	0.148	0.131	0.131	0.174	0.157	0.157	0.157	0.157	0.157	0.139	0.187	0.168	0.168	0.168			
	RPM	11065	9959	9959	9959	9959	8852	8852	9180	8262	8262	8262	8262	8262	7344	6830	6147	6147	6147			
	FEED	3629	2948	2948	2948	2948	2319	2319	3195	2594	2594	2594	2594	2594	2042	2554	2065	2065	2065			
Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143			
41	Vc	232	209	209	209	209	185	185	242	218	218	218	218	218	194	216	195	195	195			
	fz	0.150	0.135	0.135	0.135	0.135	0.120	0.120	0.160	0.144	0.144	0.144	0.144	0.144	0.128	0.170	0.153	0.153	0.153			
	RPM	9221	8299	8299	8299	8299	7377	7377	7704	6934	6934	6934	6934	6934	6163	5737	5163	5163	5163			
	FEED	2766	2241	2241	2241	2241	1770	1770	2465	1997	1997	1997	1997	1997	1578	1951	1580	1580	1580			
Ap	0.122	0.109	0.109	0.109	0.095	0.095	0.088	0.153	0.136	0.136	0.136	0.136	0.136	0.119	0.119	0.184	0.163	0.143	0.143			


HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING



RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Material Description	Slotting Ae	Parameter L.B.S	Diameter (Ø)																				
					0.2 0.5	0.2 1	0.2 1.5	0.2 2	0.3 1	0.3 1.5	0.3 2	0.3 2.5	0.3 3	0.4 1	0.4 1.5	0.4 2	0.4 2.5	0.4 3	0.4 4	0.5 1	0.5 2	0.5 3			
P	5	Non-alloy steel	1.0D	Vc	31	31	28	28	46	46	42	42	42	42	67	67	67	60	60	60	82	82	74		
				fz	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.004	0.004	0.004		
				RPM	49178	49178	44260	44260	49178	49178	44260	44260	49178	49178	44260	44260	53277	53277	53277	47949	47949	47949	52458	52458	47212
				FEED	98	98	89	89	197	197	177	177	420	420	420	420	213	213	213	192	192	192	420	420	378
	Ap	0.010	0.009	0.008	0.007	0.014	0.014	0.012	0.011	0.011	0.011	0.011	0.011	0.020											

HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter LBS	Diameter (Ø)																					
			0.5 4	0.5 5	0.5 6	0.6 2	0.6 4	0.6 6	0.6 8	0.6 10	0.7 2	0.7 4	0.8 2	0.8 4	0.8 6	0.8 8	0.8 12	0.9 4	0.9 8	1 4	1 6	1 8	1 10	
P	5	Vc	74	74	66	98	88	88	78	59	113	102	102	129	129	116	116	103	144	130	154	139	139	139
		fz	0.004	0.004	0.003	0.005	0.005	0.005	0.004	0.004	0.006	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.010	0.009	0.009	0.009
		RPM	47212	47212	41966	51911	46720	46720	41529	31147	51569	46412	46412	51228	51228	46105	46105	40982	51000	45900	49178	44260	44260	44260
		FEED	378	378	252	519	467	467	332	249	619	464	464	615	615	461	461	410	714	551	984	797	797	797
	8~9	Vc	74	74	66	98	88	88	78	59	113	102	102	129	129	116	116	103	144	130	154	139	139	139
		fz	0.004	0.004	0.003	0.005	0.005	0.005	0.004	0.004	0.006	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.010	0.009	0.009	0.009
		RPM	47212	47212	41966	51911	46720	46720	41529	31147	51569	46412	46412	51228	51228	46105	46105	40982	51000	45900	49178	44260	44260	44260
		FEED	378	378	252	519	467	467	332	249	619	464	464	615	615	461	461	410	714	551	984	797	797	797
	11.1	Vc	74	74	66	98	88	88	78	59	113	102	102	129	129	116	116	103	144	130	154	139	139	139
		fz	0.004	0.004	0.003	0.005	0.005	0.005	0.004	0.004	0.006	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.010	0.009	0.009	0.009
		RPM	47212	47212	41966	51911	46720	46720	41529	31147	51569	46412	46412	51228	51228	46105	46105	40982	51000	45900	49178	44260	44260	44260
		FEED	378	378	252	519	467	467	332	249	619	464	464	615	615	461	461	410	714	551	984	797	797	797
11.2	Vc	65	65	58	88	79	79	70	53	93	84	84	103	103	93	93	82	113	102	124	111	111	111	
	fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.008	0.007	0.007	0.007	
	RPM	41310	41310	36720	46447	41802	41802	37158	27868	42230	38007	38007	40983	40983	36885	36885	32786	40072	36065	39343	35409	35409	35409	
	FEED	248	248	147	372	334	334	223	167	422	380	380	492	492	369	369	328	561	433	629	496	496	496	
H	38.1	Vc	65	65	58	88	79	79	70	53	93	84	84	103	103	93	93	82	113	102	124	111	111	111
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.008	0.007	0.007	0.007
		RPM	41310	41310	36720	46447	41802	41802	37158	27868	42230	38007	38007	40983	40983	36885	36885	32786	40072	36065	39343	35409	35409	35409
		FEED	248	248	147	372	334	334	223	167	422	380	380	492	492	369	369	328	561	433	629	496	496	496
	38.2	Vc	60	60	54	77	70	70	62	46	77	69	69	77	77	70	70	62	82	74	82	74	74	74
		fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.004	0.004	0.005	0.005	0.005	0.005	0.004	0.006	0.005	0.007	0.006	0.006	0.006
		RPM	38359	38359	34097	40983	36885	36885	32786	24590	35020	31518	31518	30737	30737	27663	27663	24590	29143	26229	26229	23606	23606	23606
		FEED	230	230	136	328	295	295	197	148	350	252	252	307	307	277	277	197	350	262	367	283	283	283
	39.1	Vc	46	46	41	57	51	51	45	34	62	56	56	67	67	60	60	54	67	60	67	60	60	60
		fz	0.002	0.002	0.002	0.003	0.003	0.003	0.002	0.002	0.004	0.003	0.003	0.004	0.004	0.003	0.003	0.003	0.005	0.005	0.006	0.005	0.005	0.005
		RPM	29507	29507	26229	30053	27048	27048	24042	18032	28335	25502	25502	26639	26639	23975	23975	21311	23679	21311	21311	19180	19180	19180
		FEED	118	118	105	180	162	162	96	72	227	153	153	213	213	192	192	128	237	213	213	192	192	192
39.2	Vc	37	37	33	46	42	42	37	28	46	42	42	51	51	46	46	41	52	46	51	46	46	46	
	fz	0.002	0.002	0.001	0.002	0.002	0.002	0.001	0.001	0.003	0.002	0.002	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	
	RPM	23606	23606	20983	24589	22130	22130	19671	14753	21115	19004	19004	20491	20491	18442	18442	16393	18215	16394	16392	14753	14753	14753	
	FEED	94	94	42	98	89	89	79	30	127	76	76	111	111	111	111	66	146	131	131	118	118	118	
39.3	Vc	28	28	25	41	37	37	33	25	42	38	38	41	41	37	37	33	41	37	41	37	37	37	
	fz	0.001	0.001	0.001	0.002	0.002	0.002	0.001	0.001	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.002	0.003	0.003	0.003	0.003	0.003	0.003	
	RPM	17705	17705	15738	21858	19672	19672	17486	13115	18952	17057	17057	16392	16392	14753	14753	13114	14571	13114	13114	11803	11803	11803	
	FEED	35	35	31	87	79	79	70	26	76	68	68	98	98	59	59	52	87	79	79	71	71	71	
40	Vc	65	65	58	88	79	79	70	53	93	84	84	103	103	93	93	82	113	102	124	111	111	111	
	fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.006	0.006	0.005	0.005	0.005	0.007	0.006	0.008	0.007	0.007	0.007	
	RPM	41310	41310	36720	46447	41802	41802	37158	27868	42230	38007	38007	40983	40983	36885	36885	32786	40072	36065	39343	35409	35409	35409	
	FEED	248	248	147	372	334	334	223	167	422	380	380	492	492	369	369	328	561	433	629	496	496	496	
41	Vc	60	60	54	77	70	70	62	46	77	69	69	77	77	70	70	62	82	74	82	74	74	74	
	fz	0.003	0.003	0.002	0.004	0.004	0.004	0.003	0.003	0.005	0.004	0.004	0.005	0.005	0.005	0.005	0.004	0.006	0.005	0.007	0.006	0.006	0.006	
	RPM	38359	38359	34097	40983	36885	36885	32786	24590	35020	31518	31518	30737	30737	27663	27663	24590	29143	26229	26229	23606	23606	23606	
	FEED	230	230	136	328	295	295	197	148	350	252	252	307	307	277	277	197	350	262	367	283	283	283	

NEXT PAGE ▶


HPI89 SERIES 2 FLUTE CORNER RADIUS for RIB PROCESSING



RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

VDI 3323	Parameter LBS	Diameter (Ø)																				
		1 12	1 16	1 20	1.5 4	1.5 8	1.5 12	1.5 15	1.5 20	2 6	2 8	2 12	2 16	2 20	2 25	2 30	3 8	3 12	3 16	3 20	3 30	3 35
5	Vc	124	93	93	196	176	176	176	157	216	216	195	195	195	173	173	211	211	190	190	190	169
	fz	0.008	0.007	0.007	0.011	0.010	0.010	0.010	0.009	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.019	0.019	0.017	0.017	0.017	0.015
	RPM	39342	29507	29507	41581	37423	37423	37423	33265	34426	34426	30983	30983	30983	27541	27541	22404	22404	20164	20164	20164	17923
	FEED	629	413	413	915	748	748	748	599	895	895	744	744	744	551	551	851	851	686	686	686	538
8~9	Vc	124	93	93	196	176	176	176	157	216	216	195	195	195	173	173	211	211	190	190	190	169
	fz	0.008	0.007	0.007	0.011	0.010	0.010	0.010	0.009	0.013	0.013	0.012	0.012	0.012	0.010	0.010	0.019	0.019	0.017	0.017	0.017	0.015
	RPM	39342	29507	29507	41581	37423	37423	37423	33265	34426	34426	30983	30983	30983	27541	27541	22404	22404	20164	20164	20164	17923
	FEED	629	413	413	915	748	748	748	599	895	895	744	744	744	551	551	851	851	686	686	686	538
11.1	Vc	124	93	93	196	176	176	176	157	216	216	195	195	195	173	173	211	211	190	190	190	169

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																			
			0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	1	1	1	1	
			3	4	5	6	2	4	6	8	10	3	4	5	6	8	10	12	2	3	4	5
P	5	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
	Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.025	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045	
	8~9	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
	Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.025	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045	
	11.1	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
RPM		51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178	
FEED		519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984	
Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.025	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045		
11.2	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124	
	fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008	
	RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343	
	FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629	
Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038		
H	38.1	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124
		fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008
		RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343
		FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629
	Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038	
	38.2	Vc	77	70	70	70	77	69	69	62	62	77	77	70	70	70	62	62	82	82	82	82
		fz	0.004	0.004	0.004	0.004	0.005	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007	0.007	0.007	0.007
		RPM	40983	36885	36885	36885	35020	31518	31518	28016	28016	30737	30737	27663	27663	27663	24590	24590	26229	26229	26229	26229
		FEED	328	295	295	295	350	252	252	224	224	307	307	277	277	277	197	197	367	367	367	367
	Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038	
	39.1	Vc	57	51	51	51	62	56	56	50	50	67	67	60	60	60	54	54	67	67	67	67
		fz	0.003	0.003	0.003	0.003	0.004	0.003	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.005
RPM		30053	27048	27048	27048	28335	25502	25502	22668	22668	26639	26639	23975	23975	23975	21311	21311	21311	21311	21311	21311	
FEED		180	162	162	162	227	153	153	136	136	213	213	192	192	192	128	128	213	213	213	213	
Ap	0.022	0.019	0.017	0.017	0.028	0.022	0.020	0.020	0.017	0.029	0.029	0.026	0.026	0.022	0.022	0.019	0.040	0.040	0.036	0.036		
39.2	Vc	46	42	42	42	46	42	42	37	37	51	51	46	46	46	41	41	51	51	51	51	
	fz	0.002	0.002	0.002	0.002	0.003	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.004	0.004	0.004	0.004	
	RPM	24589	22130	22130	22130	21115	19004	19004	16892	16892	20491	20491	18442	18442	18442	16393	16393	16392	16392	16392	16392	
	FEED	98	89	89	89	127	76	76	68	68	123	123	111	111	111	66	66	131	131	131	131	
Ap	0.022	0.019	0.017	0.017	0.028	0.022	0.020	0.020	0.017	0.029	0.029	0.026	0.026	0.022	0.022	0.019	0.040	0.040	0.036	0.036		
39.3	Vc	41	37	37	37	42	38	38	33	33	41	41	37	37	37	33	33	41	41	41	41	
	fz	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	
	RPM	21858	19672	19672	19672	18952	17057	17057	15162	15162	16392	16392	14753	14753	14753	13114	13114	13114	13114	13114	13114	
	FEED	87	79	79	79	76	68	68	61	61	98	98	59	59	59	52	52	79	79	79	79	
Ap	0.018	0.016	0.014	0.014	0.023	0.018	0.016	0.016	0.014	0.023	0.023	0.021	0.021	0.018	0.018	0.016	0.033	0.033	0.029	0.029		
40	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124	
	fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008	
	RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343	
	FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629	
Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038		
41	Vc	77	70	70	70	77	69	69	62	62	77	77	70	70	70	62	62	82	82	82	82	
	fz	0.004	0.004	0.004	0.004	0.005	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007	0.007	0.007	0.007	
	RPM	40983	36885	36885	36885	35020	31518	31518	28016	28016	30737	30737	27663	27663	27663	24590	24590	26229	26229	26229	26229	
	FEED	328	295	295	295	350	252	252	224	224	307	307	277	277	277	197	197	367	367	367	367	
Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038		

NEXT PAGE ▶


HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING



RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																		
			1	1	1	1	1	1	1	1	1	1	1.2	1.2	1.2	1.2	1.4	1.4	1.5	1.5	1.5
			6	7	8	9	10	12	14	16	18	20	22	6	8	10	12	16	6	12	4
P	5	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153						

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter	Diameter (Ø)																			
			1.5					1.6					1.8					2				
			10	12	14	16	18	20	25	30	35	6	8	6	8	10	12	14	16	18	2	2
P	5	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	895	895
	8~9	Vc	176	176	176	157	157	118	118	59	201	201	226	226	203	203	203	203	203	216	216	
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.013	0.013	
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	895	895
	11.1	Vc	176	176	176	157	157	118	118	59	201	201	226	226	203	203	203	203	203	216	216	
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.013	0.013	
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	895	895
11.2	Vc	139	139	139	123	123	93	93	46	161	161	181	181	163	163	163	163	163	170	170		
	fz	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.013	0.013		
	RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	27049	27049		
	FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	703	703		
H	38.1	Vc	139	139	139	123	123	93	93	46	161	161	181	181	163	163	163	163	163	170	170	
		fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.013	0.013	
		RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	27049	27049	
		FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	703	703	
	38.2	Vc	93	93	93	83	83	62	62	31	106	106	119	119	107	107	107	107	107	113	113	
		fz	0.008	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.005	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.012	0.012	
		RPM	19745	19745	19745	17551	17551	17551	13163	13163	6582	21106	21106	21106	21106	18995	18995	18995	18995	18032	18032	
		FEED	316	316	316	246	246	246	158	158	66	422	422	422	422	342	342	342	342	433	433	
	39.1	Vc	74	74	74	66	66	50	50	25	85	85	96	96	87	87	87	87	87	93	93	
		fz	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.004	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.009	0.009	
		RPM	15759	15759	15759	14008	14008	14008	10506	10506	5253	17007	17007	17007	17007	15306	15306	15306	15306	14754	14754	
		FEED	189	189	189	140	140	140	105	105	42	238	238	238	238	184	184	184	184	266	266	
39.2	Vc	56	56	56	50	50	37	37	19	65	65	73	73	66	66	66	66	66	72	72		
	fz	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.003	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.007	0.007		
	RPM	11866	11866	11866	10547	10547	10547	7910	7910	3955	12910	12910	12910	12910	11619	11619	11619	11619	11475	11475		
	FEED	119	119	119	84	84	84	63	63	24	155	155	155	155	116	116	116	116	161	161		
39.3	Vc	47	47	47	42	42	31	31	16	55	55	61	61	55	55	55	55	55	62	62		
	fz	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.005	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.006	0.006		
	RPM	9919	9919	9919	8817	8817	8817	6613	6613	3306	10860	10860	10860	10860	9774	9774	9774	9774	9835	9835		
	FEED	79	79	79	71	71	71	40	40	20	109	109	109	109	78	78	78	78	118	118		
40	Vc	139	139	139	123	123	93	93	46	161	161	181	181	163	163	163	163	163	170	170		
	fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.013	0.013		
	RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	27049	27049		
	FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	703	703		
41	Vc	93	93	93	83	83	62	62	31	106	106	119	119	107	107	107	107	107	113	113		
	fz	0.008	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.005	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.012	0.012		
	RPM	19745	19745	19745	17551	17551	17551	13163	13163	6582	21106	21106	21106	21106	18995	18995	18995	18995	18032	18032		
	FEED	316	316	316	246	246	246	158	158	66	422	422	422	422	342	342	342	342	433	433		

NEXT PAGE ▶

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING




RPM = rev./min. FEED = mm/min.
Vc = m/min. fz = mm/tooth

ISO	VDI 3323	Parameter	Diameter (Ø)																			
			2				2.5				3				3							
			8	10	12	14	16	18	20	25	30	35	40	50	8	12	16	20	30	40	50	8
P	5	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	
		RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	
		FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	
	8~9	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	
		RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	
		FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	
	11.1	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	
		RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	
		FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	
11.2	Vc	170	170	153	153	153	153	153	136	136	102	102	51	170	170	153	153	136	102	102		
	fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.017	0.017	0.015	0.015	0.013	0.012	0.012		
	RPM	27049	27049	24344	24344	24344	24344	24344	21639	21639	16229	16229	8115	21630	21630	19467	19467	17304	12978	12978		
	FEED	703	703	584	584	584	584	584	433													



HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING



ISO	VDI 3323	Parameter L.B.S	Diameter (Ø)																	
			3 16	3 20	3 25	3 30	4 12	4 16	4 20	4 30	4 40	4 50	5 20	5 30	5 40	5 50	6 20	6 30	6 40	6 50
P	5	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240	0.210
	8~9	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240	0.210
	11.1	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240	0.210
	11.2	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
H	38.1	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
	38.2	Vc	102	102	102	102	113	113	113	102	102	91	134	121	121	121	134	134	121	121
		fz	0.016	0.016	0.016	0.016	0.025	0.025	0.025	0.023	0.023	0.020	0.030	0.027	0.027	0.027	0.035	0.035	0.032	0.032
		RPM	10819	10819	10819	10819	9017	9017	9017	8115	8115	7214	8524	7672	7672	7672	7104	7104	6394	6394
		FEED	346	346	346	346	451	451	451	373	373	289	511	414	414	414	497	497	409	409
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179
	39.1	Vc	83	83	83	83	93	93	93	83	83	74	103	93	93	93	103	103	93	93
		fz	0.013	0.013	0.013	0.013	0.019	0.019	0.019	0.017	0.017	0.015	0.022	0.020	0.020	0.020	0.026	0.026	0.023	0.023
		RPM	8852	8852	8852	8852	7377	7377	7377	6639	6639	5902	6557	5901	5901	5901	5464	5464	4918	4918
		FEED	230	230	230	230	280	280	280	226	226	177	289	236	236	236	284	284	226	226
		Ap	0.096	0.096	0.084	0.084	0.160	0.144	0.144	0.128	0.112	0.112	0.180	0.160	0.160	0.140	0.216	0.216	0.192	0.168
	39.2	Vc	65	65	65	65	72	72	72	65	65	58	82	74	74	74	82	82	74	74
		fz	0.010	0.010	0.010	0.010	0.015	0.015	0.015	0.014	0.014	0.012	0.018	0.016	0.016	0.016	0.021	0.021	0.019	0.019
		RPM	6885	6885	6885	6885	5737	5737	5737	5163	5163	4590	5246	4721	4721	4721	4371	4371	3934	3934
		FEED	138	138	138	138	172	172	172	145	145	110	189	151	151	151	184	184	149	149
		Ap	0.096	0.096	0.084	0.084	0.160	0.144	0.144	0.128	0.112	0.112	0.180	0.160	0.160	0.140	0.216	0.216	0.192	0.168
39.3	Vc	56	56	56	56	62	62	62	56	56	49	72	65	65	65	72	72	65	65	
	fz	0.008	0.008	0.008	0.008	0.012	0.012	0.012	0.011	0.011	0.010	0.015	0.013	0.013	0.013	0.018	0.018	0.016	0.016	
	RPM	5901	5901	5901	5901	4918	4918	4918	4426	4426	3934	4590	4131	4131	4131	3825	3825	3443	3443	
	FEED	94	94	94	94	118	118	118	97	97	79	138	107	107	107	138	138	110	110	
	Ap	0.078	0.078	0.068	0.068	0.130	0.117	0.117	0.104	0.091	0.091	0.146	0.130	0.130	0.114	0.176	0.176	0.156	0.137	
40	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181	181	
	fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033	0.033	
	RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590	9590	
	FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633	633	
	Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179	
41	Vc	102	102	102	102	113	113	113	102	102	91	134	121	121	121	134	134	121	121	
	fz	0.016	0.016	0.016	0.016	0.025	0.025	0.025	0.023	0.023	0.020	0.030	0.027	0.027	0.027	0.035	0.035	0.032	0.032	
	RPM	10819	10819	10819	10819	9017	9017	9017	8115	8115	7214	8524	7672	7672	7672	7104	7104	6394	6394	
	FEED	346	346	346	346	451	451	451	373	373	289	511	414	414	414	497	497	409	409	
	Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204	0.179	

HIGH QUALITY PRODUCTS and ON TIME DELIVERY
for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

- BELGIUM
- FINLAND
- ITALY
- PORTUGAL
- SLOVENIA
- THE NETHERLANDS
- CROATIA
- FRANCE
- LITHUANIA
- ROMANIA
- SPAIN
- TÜRKIYE
- CZECH REPUBLIC
- GERMANY
- NORWAY
- SWEDEN
- UNITED KINGDOM
- DENMARK
- HUNGARY
- POLAND
- SERBIA
- SWITZERLAND
- AUSTRIA
- GREECE
- ALBANIA
- BOSNIA AND HERZEGOVINA
- UKRAINE
- UZBEKISTAN
- BULGARIA
- ESTONIA

ASIA PACIFIC

- AUSTRALIA
- INDONESIA
- MALAYSIA
- SOUTH KOREA
- VIETNAM
- CHINA
- ISRAEL
- PAKISTAN
- TAIWAN
- HONG KONG
- JAPAN
- PHILIPPINES
- THAILAND
- INDIA
- SAUDI ARABIA
- SINGAPORE
- UNITED ARAB EMIRATES

AMERICAS

- BRAZIL
- CANADA
- COLOMBIA
- MEXICO
- UNITED STATES

AFRICA

- EGYPT
- SOUTH AFRICA

YG-1 CO., LTD.

* For the more information on sales network, please contact the head office as below;

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil, Yeosu-gu, Incheon 21984, South Korea

Phone: +82-32-526-0909

<https://www.yg1.kr>

E-mail: yg1@yg1.kr



YG-1 CO., LTD.

HEAD OFFICE

13-40, Songdogwahak-ro 16beon-gil,
Yeonsu-gu, Incheon 21984, South Korea

Notice YG-1 Global head office is relocating from December 2020 to a new address as above;

Phone: +82-32-526-0909

www.yg1.kr

E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets



YG1YEX1EH2310001