



Leading Through Innovation

HSS & HSSCo8

COUNTERSINKS

SENKER

- For Deburring, Chamfering and Countersinking
- Zum Entgraten, Anfasen und Senken

SELECTION GUIDE



SERIES	C1109 C3109	C1119 C3119
STANDARD	-	-
POINT ANGLE	90°	90°
SIZE MIN	D10.0	D10.0
SIZE MAX	D50.0	D50.0
PAGE	A410	A411

SURFACE TREATMENT Bright

HSS & HSSCo8 COUNTERSINKS

For Deburring, Chamfering and Countersinking



© : Excellent ○ : Good
Recommended cutting conditions : p.A415

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	
P	1	Non-alloy steel	About 0.15% C Annealed	125		
	2		About 0.45% C Annealed	190	13	
	3		About 0.45% C Quenched & Tempered	250	25	
	4		About 0.75% C Annealed	270	28	
	5		About 0.75% C Quenched & Tempered	300	32	
	6	Low alloy steel	Annealed	180	10	
	7		Quenched & Tempered	275	29	
	8		Quenched & Tempered	300	32	
	9		Quenched & Tempered	350	38	
	10		High alloyed steel, and tool steel	Annealed	200	15
	11			Quenched & Tempered	325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	
	13		Martensitic Quenched & Tempered	240	23	
	14		Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	
	16		Pearlitic (Martensitic)	260	26	
	17	Nodular cast iron	Ferritic	160	3	
	18		Pearlitic	250	25	
	19		Ferritic	130		
	20		Pearlitic	230	21	
N	21	Aluminum-wrought alloy	Not Curable	60		
	22		Curable Hardened	100		
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		
	24		≤ 12% Si, Curable Hardened	90		
	25		> 12% Si, Not Curable	130		
	26		Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90	
	27	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic	100		
	28		Rubber, Wood, etc.			
	29					
	S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15
32		Cured		280	30	
33		Annealed		250	25	
34		Ni or Co Based Cured		350	38	
35		Cast		320	34	
36		Titanium Alloys		Pure Titanium	400 Rm	
37	Alpha + Beta Alloys Hardened		1050 Rm			
H	38	Hardened steel	Hardened	550	55	
	39		Hardened	630	60	
	40		Chilled Cast Iron	Cast	400	42
	41		Hardened Cast Iron	Hardened	550	55



C1136 C3136	C1139 C3139	C1132 C3132
DIN334C	DIN335C	-
60°	90°	120°
D6.3	D4.3	D8.0
D25.0	D31.0	D25.0
A412	A413	A414

Bright




○	○	○	1
◎	◎	◎	2
○	○	○	3
○	○	○	4
○	○	○	5
○	○	○	6
○	○	○	7
○	○	○	8
○	○	○	9
○	○	○	10
○	○	○	11
○	○	○	12
○	○	○	13
○	○	○	14
◎	◎	◎	15
○	○	○	16
○	○	○	17
○	○	○	18
○	○	○	19
○	○	○	20
◎	◎	◎	21
○	○	○	22
○	○	○	23
○	○	○	24
○	○	○	25
○	○	○	26
○	○	○	27
○	○	○	28
○	○	○	29
○	○	○	30
○	○	○	31
○	○	○	32
○	○	○	33
○	○	○	34
○	○	○	35
○	○	○	36
○	○	○	37
○	○	○	38
○	○	○	39
○	○	○	40
○	○	○	41

HSS & HSSCo8, DEBURRING TOOL with HOLE

- HSS, QUERLOCHSENKER
- FRAISE HSS À ÉBAVURER À TROU
- SVASATORI CON FORO - HSS

- For light metals and plastics.
- For deburring and small chamfers.
- Best surface finish.
- Works without vibrations.
- Für Leichtmetall und Plastik
- Zum Entgraten und Abfasen
- Bestes Oberflächenfinish
- Arbeitet ohne Vibration

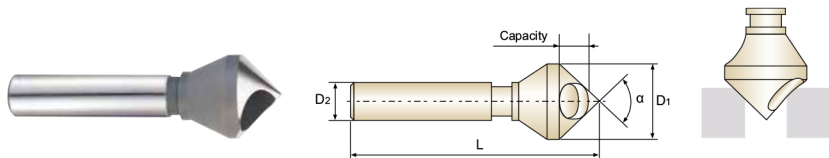

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1109100	C3109100	90°	10.0	6	45	2 - 5
C1109150	C3109150	90°	15.0	8	55	6 - 14
C1109200	C3109200	90°	20.0	10	65	8 - 18
C1109250	C3109250	90°	25.0	12	78	10 - 23
C1109300	C3109300	90°	30.0	12	88	12 - 28
C1109350	C3109350	90°	35.0	16	110	14 - 33
C1109400	C3109400	90°	40.0	16	115	16 - 38
C1109450	C3109450	90°	45.0	16	120	18 - 43
C1109500	C3109500	90°	50.0	16	130	20 - 48

►TIN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
+0.3/-0	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M					F																									
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	29	3	25	130	230																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


A410 phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

YG-1 CO., LTD.

HSS & HSSCo8, SINGLE FLUTE CHAMFERING CUTTERS

- HSS, EINSCHNEIDEN KEGELENKER
- FRAISE HSS À CHANFREINER 1 DENT
- SVASATORI MONOTAGLIENTE - HSS

- For wood and hard plastics.
- Can drill in sheet materials.
- Easy to resharpen.
- Works without vibrations.
- Für Holz und Hartplastik
- Kann in Bleche bohren
- Leicht nachzuschärfen
- Arbeitet ohne Vibration

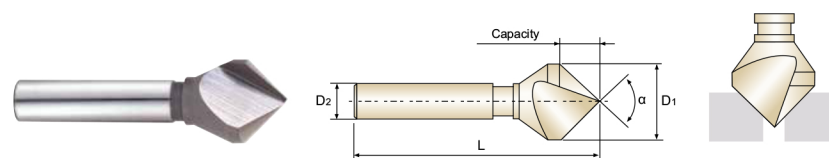

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1119100	C3119100	90°	10.0	6	45	1 - 10
C1119150	C3119150	90°	15.0	8	55	2 - 15
C1119200	C3119200	90°	20.0	10	65	2 - 20
C1119250	C3119250	90°	25.0	12	78	3 - 25
C1119300	C3119300	90°	30.0	12	88	3 - 30
C1119350	C3119350	90°	35.0	16	110	4 - 35
C1119400	C3119400	90°	40.0	16	115	5 - 40
C1119450	C3119450	90°	45.0	16	120	10 - 45
C1119500	C3119500	90°	50.0	16	130	12 - 50

►TIN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
+0.3/-0	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M					F																									
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	29	3	25	130	230																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

A411

- HSS, QUERLOCHSENKER
- FRAISE HSS À ÉBAVURER À TROU
- SVASATORI CON FORO - HSS

- For light metals and plastics.
- For deburring and small chamfers.
- Best surface finish.
- Works without vibrations.
- Für Leichtmetall und Plastik
- Zum Entgraten und Abfasen
- Bestes Oberflächenfinish
- Arbeitet ohne Vibration



Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1109100	C3109100	90°	10.0	6	45	2 - 5
C1109150	C3109150	90°	15.0	8	55	6 - 14
C1109200	C3109200	90°	20.0	10	65	8 - 18
C1109250	C3109250	90°	25.0	12	78	10 - 23
C1109300	C3109300	90°	30.0	12	88	12 - 28
C1109350	C3109350	90°	35.0	16	110	14 - 33
C1109400	C3109400	90°	40.0	16	115	16 - 38
C1109450	C3109450	90°	45.0	16	120	18 - 43
C1109500	C3109500	90°	50.0	16	130	20 - 48

►TIN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
+0.3/-0	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M					F																									
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron																			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	29	3	25	130	230																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																					
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

A411

CARBIDE
HSS
I-ONE DRILLS
I-DREAM DRILLS
DREAM DRILLS -PRO
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -MQL
DREAM DRILLS -HIGH HARDED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA


YG COUNTERSINKS

C1136 SERIES
C3136 SERIES

HSS & HSSCo8, THREE FLUTE COUNTERSINKS (60°)

- HSS, DREISCHNEIDEN KEGELSENKER (60°)
- FRAISE HSS À CHANFREINER 3 DENTS (60°)
- SVASATORI A TRE TAGLIENTI - HSS (60°)

- Self-centering (3 flutes)
- For deburring, chamfering and countersinking
- Hand using
- Longitudinal chamfers and contouring
- Works without vibrations
- Selbstzentrierend
- Besonders geeignet zum 90° Ansenken für Senkkopfschrauben
- Manueller Einsatz möglich
- Zum Entgraten von Längs- und Profilkanten
- Arbeitet ohne Vibration

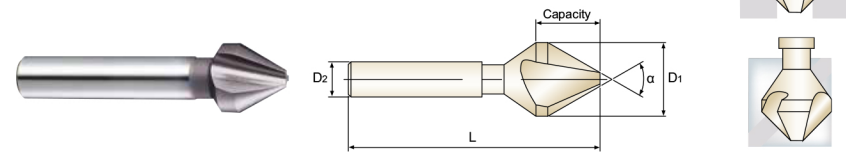

DIN 334C Bright p.A416 Plain Shank Page
 Recommended Toolholder ER COLLET CHUCK D73-115

Unit : mm

EDP No. (uncoating)		Point Angle α	Cutter Diameter D1	Shank Diameter D2	Overall Length L(±1)	Capacity min/max
HSSCo8	HSS					
C1136063	C3136063	60°	6.3	5	45	1.6~6.3
C1136080	C3136080	60°	8.0	6	50	2.0~8.0
C1136100	C3136100	60°	10.0	6	50	2.5~10.0
C1136125	C3136125	60°	12.5	8	56	3.2~12.5
C1136160	C3136160	60°	16.0	10	63	4.0~16.0
C1136200	C3136200	60°	20.0	10	67	5.0~20.0
C1136250	C3136250	60°	25.0	10	71	6.3~25.0

► TiN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
±0.05	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M					F				
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	29	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○						○	○	○		◎	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	○	○	○	○	○	○	○													

A412 phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr YG-1 CO., LTD.


YG COUNTERSINKS

C1139 SERIES
C3139 SERIES

HSS & HSSCo8, THREE FLUTE COUNTERSINKS (90°)

- HSS, DREISCHNEIDEN KEGELSENKER (90°)
- FRAISE HSS À CHANFREINER 3 DENTS (90°)
- SVASATORI A TRE TAGLIENTI - HSS (90°)

- Self-centering (3 flutes).
- Designed for 90° capscrews countersinking.
- Hand using.
- Longitudinal chamfers and contouring.
- Works without vibrations
- Selbstzentrierend
- Besonders geeignet zum 90° Ansenken für Senkkopfschrauben
- Manueller Einsatz möglich
- Zum Entgraten von Längs- und Profilkanten
- Arbeitet ohne Vibration

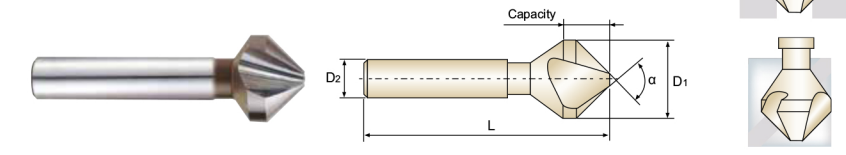

DIN 334C Bright p.A416 Plain Shank Page
 Recommended Toolholder ER COLLET CHUCK D73-115

Unit : mm

EDP No. (uncoating)		Point Angle α	Cutter Diameter D1	Shank Diameter D2	Overall Length L(±1)	Capacity min/max
HSSCo8	HSS					
C1139043	C3139043	90°	4.3	4	40	1.3 - 4.3
C1139050	C3139050	90°	5.0	4	40	1.5 - 5.0
C1139060	C3139060	90°	6.0	5	45	1.5 - 6.0
C1139063	C3139063	90°	6.3	5	45	1.5 - 6.3
C1139070	C3139070	90°	7.0	6	50	1.8 - 7.0
C1139080	C3139080	90°	8.0	6	50	2.0 - 8.0
C1139083	C3139083	90°	8.3	6	50	2.0 - 8.3
C1139100	C3139100	90°	10.0	6	50	2.5 - 10.0
C1139104	C3139104	90°	10.4	6	50	2.5 - 10.4
C1139115	C3139115	90°	11.5	8	56	2.8 - 11.5
C1139124	C3139124	90°	12.4	8	56	2.8 - 12.4
C1139150	C3139150	90°	15.0	10	60	3.2 - 15.0
C1139165	C3139165	90°	16.5	10	60	3.2 - 16.5
C1139190	C3139190	90°	19.0	10	63	3.5 - 19.0
C1139205	C3139205	90°	20.5	10	63	3.5 - 20.5
C1139230	C3139230	90°	23.0	10	67	3.8 - 23.0
C1139250	C3139250	90°	25.0	10	67	3.8 - 25.0
C1139300	C3139300	90°	30.0	12	71	4.2 - 30.0
C1139310	C3139310	90°	31.0	12	71	4.2 - 31.0

► TiN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
±0.05	h9	+0/-1

◎ : Excellent ○ : Good

ISO Material Description	P										M					F				
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	29	3	25	13	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○							○	○	○	◎	○	○	○	○	○

ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	○	○	○	○	○	○	○													

A413 phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr YG-1 CO., LTD.

CARBIDE
HSS
I-ONE DRILLS
I-DREAM DRILLS
DREAM DRILLS -PRO
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -MQL
DREAM DRILLS -HIGH HARDED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

YG COUNTERSINKS


C1132 SERIES

C3132 SERIES

HSS & HSSCo8, THREE FLUTE COUNTERSINKS (120°)

- HSS, DREISCHNEIDEN KEGELSENKER (120°)
- FRAISE HSS À CHANFREINER 3 DENTS (120°)
- SVASATORI A TRE TAGLIENTI - HSS (120°)

- Self-centering (3 flutes)
- For deburring, chamfering and countersinking
- Hand using
- Longitudinal chamfers and contouring
- Works without vibrations
- Selbstzentrierend
- Zum Entgraten, Abfasen und Senkkopfschrauben
- Manueller Einsatz möglich
- Zum Entgraten von Längs- und Profilkanten
- Arbeitet ohne Vibration

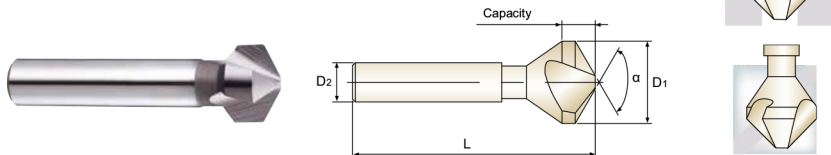

p.A416



Plain Shank Page
ER COLLET CHUCK D73-115

Unit : mm

EDP No. (uncoating)		Point Angle	Cutter Diameter	Shank Diameter	Overall Length	Capacity
HSSCo8	HSS	α	D1	D2	L(±1)	min/max
C1132080	C3132080	120°	8.0	6	49	2.0~8.0
C1132125	C3132125	120°	12.5	8	54	2.8~12.5
C1132160	C3132160	120°	16.0	10	57	3.2~16.0
C1132200	C3132200	120°	20.0	10	59	3.5~20.0
C1132250	C3132250	120°	25.0	10	65	3.8~25.0

TIN & TiCN coating are available on your request.

Cutter Dia. Tolerance(mm)	Shank Dia. Tolerance(mm)	Point Angle Tolerance(°)
±0.05	h9	+0/-1

◎ : Excellent ○ : Good

ISO	P										M						K						
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel			Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron				
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
VDI 3323	13	25	28	32	10	29	32	38	15	35	15	23	10	10	28	3	25	130	230	21	22	23	
HRC	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	21	22	23
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	◎	○	○	○	○	○	○	○	○

ISO	N								S					H								
	Aluminum-wrought alloy		Aluminum-cast alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron						
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323	60	100	75	90	130	110	90	100	200	280	250	350	320	400Rm	1050Rm	550	630	400	400	42	55	
HRC	60	100	75	90	130	110	90	100	200	280	250	350	320	400Rm	1050Rm	550	630	400	400	42	55	
Recommended	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

A414 phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

YG YG-1 CO., LTD.

YG COUNTERSINKS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

C1109, C3109, C1119, C3119 SERIES

DEBURRING TOOL with HOLE 1 FLUTE CHAMFERING CUTTERS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Feed						
				10.0	15.0	20.0	25.0	30.0	40.0	50.0
P	1	Non-alloy steel	40	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	2		40	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	3		25	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27
	4		18	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20
	5		18	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20
M	12	Stainless steel	8	0.05-0.07	0.07-0.09	0.07-0.09	0.09-0.11	0.09-0.11	0.11-0.14	0.11-0.14
	13		7	0.05-0.07	0.07-0.09	0.07-0.09	0.09-0.11	0.09-0.11	0.11-0.14	0.11-0.14
	14		6	0.05-0.07	0.07-0.09	0.07-0.09	0.09-0.11	0.09-0.11	0.11-0.14	0.11-0.14
	15		28	0.13-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.34
K	16	Grey cast iron	24	0.12-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33
	17	Nodular cast iron	24	0.13-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.34
	18		20	0.12-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33
	19	Malleable cast iron	24	0.13-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.34
	20	20	0.12-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33	
N	21	Aluminum-wrought alloy	56	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36
	22		56	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36
	23	54	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36	
	24	Aluminum-cast, alloyed	52	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36
	25		50	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36
	26		38	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37
	27	Copper and Copper Alloys (Bronze / Brass)	35	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37
	28		25	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30	0.30-0.33	0.33-0.36

YG YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.kr, E-mail:yg1@yg1.kr

A415


**C1136, C3136, C1139,
C3139, C1132, C3132**

SERIES

3 FLUTE COUNTERSINKS

RPM = rev./min.

FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Feed							
				5.0	10.0	15.0	20.0	25.0	30.0	40.0	50.0
P	1	Non-alloy steel	20	0.12-0.16	0.16-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33	0.33-0.37	0.37-0.41
	2		20	0.12-0.16	0.16-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.33	0.33-0.37	0.37-0.41
	3		13	0.10-0.14	0.14-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.39
	4		10	0.06-0.10	0.10-0.14	0.14-0.17	0.17-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35
	5		10	0.06-0.10	0.10-0.14	0.14-0.17	0.17-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35
M	12	Stainless steel	6	0.06-0.08	0.06-0.08	0.08-0.10	0.08-0.10	0.10-0.12	0.10-0.12	0.12-0.15	0.12-0.15
	13		5	0.06-0.08	0.06-0.08	0.08-0.10	0.08-0.10	0.10-0.12	0.10-0.12	0.12-0.15	0.12-0.15
	14		4	0.06-0.08	0.06-0.08	0.08-0.10	0.08-0.10	0.10-0.12	0.10-0.12	0.12-0.15	0.12-0.15
K	15	Grey cast iron	22	0.09-0.11	0.11-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32
	16		17	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31
	17	Nodular cast iron	17	0.09-0.11	0.11-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32
	18		15	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31
	19		Malleable cast iron	17	0.09-0.11	0.11-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28
20	15	0.08-0.10		0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	
N	21	Aluminum-wrought alloy	42	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	22		42	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	23	Aluminum-cast, alloyed	39	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	24		37	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	25		35	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.31	0.31-0.35	0.35-0.40	0.40-0.45
	26		28	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	27	Copper and Copper Alloys (Bronze / Brass)	25	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42
	28		15	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.28	0.28-0.32	0.32-0.37	0.37-0.42